



# LIFE LINE

EMERGENCY VEHICLES

QUOTATION 10306-0001 021225A

City of Berlin  
Evan VandenLangenberg  
PO Box 272  
108 N Capron Street  
Berlin, WI 54923  
(920) 361-5457

Jefferson Fire & Safety, Inc.  
James Schulenburg  
7620 Donna Drive  
Middleton, WI 53562  
608-574-2264  
james@jeffersonfire.com

Exp. Date: 03/13/2025  
Quote No: 10306-0001 Berlin WI Type 1 Quote 021225  
BODY: VICTORY D 167" VICTORYLINER TYPE I

02/12/2025

Page 1

PART NO	S	DESCRIPTION	QTY
== 167" VICTORYLINER TYPE I - 2.000 02/04/25 ==			
MASTER PARTS REVISION DATE (Start 02-04-25 to 04-01-25)			
00-00-0500		LIFE LINE WARRANTY Warranties Include: Lifetime Modular Body Warranty Lifetime Electrical Harness Warranty Lifetime Limited Cabinet Warranty 5-Year/60,000 Mile Product Conversion Warranty 10-Year/100,000 Mile Electrical Warranty Elite System 6-Year Pro-Rated LL Paint Warranty Which is as follows: For 3 Years 100% 4th Year 50% 5th Year 25% 6th Year 10%	1
00-00-0700		>>>SHOP COPY DATE - FACTORY USE ONLY<<< Date Order Placed By Dealer:  Draft Work Order Process Date:  1st Dealer Draft Date:  Final Dealer Draft Date:  Sign-Off Date Pending Production Review:  Parts/Drafting/Paint:	1

PART NO	S	DESCRIPTION	QTY
		Pre-build Release Date:	
		Shop Release Date:	
		SFD:	
00-00-0800		Customer Contact Person (Required For Factory Use) Specify Name And Number:T.B.A.	1
00-00-0805		Customer End User Contact Person & E-mail (Required For Factory Use) Specify Name and E-mail:	1
00-00-2100	S	<i>Sales Rep: James Schulenburg 608-574-2264</i> Jefferson Fire & Safety, Inc.	1
00-00-FL00		Fill Unit With Fuel For Delivery (Charge To Dealer Account)	1
00-00-FN00		<i>Specify FORD Fleet Number If Available (FORD Chassis Only)</i> Specify FIN Number: QX921	1
00-00-PU00		<i>Specify Previous Unit Number: (FACTORY USE ONLY)</i> 5471	1
		***BODY STYLE***	
00-02-1700	S	<i>167" x 96" VICTORYLINER TYPE I PASS-THRU (F-450/550 OR RAM)</i> ***CHASSIS***	1
10-00-0100		Chassis VIN Number: (FACTORY USE ONLY)	1
10-00-5110		<i>2025 Ford F-550 193" W.B. 18,000 GVWR 4 WD Cab/Chassis (Gas V8 Engine)</i> Includes the standard Ford O.E.M. 3 year/36,000 mile warranty.	1
		NOTE: FINAL CHASSIS MODEL YEAR & PRICING IS NOT YET AVAILABLE AND IS SUBJECT TO CHANGE PRIOR TO DELIVERY TO LIFE LINE.	
10-00-5310		<i>Order Ford Chassis with OEM Aluminum Wheels ILOS Steel Wheels</i> This option ordered with the chassis.	1
10-00-5401		<i>Ford XLT (17V) Value Package</i> Ford XLT value package (17V)	1
		Includes: -Remote Start -Auto lock/unlock -Power adjustable pedals -Eight-way powered driver's seat	
10-00-6055	S	<i>Liquid Spring Suspension Kit For Ford F-550</i> Controller location will be to the right of the steering column.	1
		NOTE: This option is provided by an off-site vendor. Be sure to have the Liquid Spring Serial # (Located in the Electrical Cabinet) & the date in service of the LL unit before calling. All warranty claims/issues are to be referred to Liquid Spring support at this number:	

PART NO	S	DESCRIPTION	QTY
		765-474-7816 Ext. 136	
10-01-3400		<b>**FACTORY USE ONLY**</b> Spare key and owner's manual to be shipped loose with the completed vehicle.	1
10-01-8000		<b>Delete Standard Wheel Covers</b>	1
10-02-1200		<b>F-Series O.E.M. Door Mirrors</b> Dual arm, powered, heated trailer tow mirrors.	1
10-02-3500		O.E.M. Radio W/Cab Speakers	1
10-02-5000		Low Voltage Throttle Manager	1
10-02-5700		Hand Held Cab Spot Light This option includes a 12v outlet for the light.  Standard location of outlet is behind the driver seat next to console unless otherwise specified. Spot light to ship loose unless otherwise specified.	1
10-03-0000		<b>Large Custom Floor Console</b> (See drawings)	1
10-03-0035		<b>Add 15 Degree Wedge to Front Electrical Control Panel Screen</b> Life Line part #P07210-REV C	1
10-03-8200		<b>Add Auto Dump Feature To Rear O.E.M. Lowering Suspension System w/"OS" Light</b> Wire a circuit to automatically dump the rear suspension when the secondary rear module door is opened. There will be an ON-OFF style switch, with a stainless guard, installed on the inner door panel of the primary rear module entry door. This switch will prevent the dump feature from activating with secondary rear door. The switch will only be lit when it is activated.  There shall be a Whelen Red "OS" System Dumped Warning Light On Front Console. Please specify the location for the light:	1
10-03-8900		3 Battery Package Standard-All Matching CCA Of The Standard Battery Two of the OEM Batteries remain under the chassis hood, with the third battery in an exterior compartment.	1
10-04-3500		Owner's Manual (1 Included With Unit) <b>***MODULAR BODY TYPE I***</b>	1
15-01-1656		Federal K-Spec Package Thru Change Notice 14 (Victoryliner) Includes: - Upgraded vinyl 40oz or better - (2) 5# Badger fire extinguishers, shipped loose. - Oxygen wrench, shipped loose. - Lock on cab-to-module door or window that is lockable from cab side. - Will meet federal K-Spec through the current change notice. - Includes Weight Labels on all interior storage compartments. - Includes SSCOR suction canister clip #230-00003 - Units equipped with an A-Bar, it shall include a Wire Lock Pin/Spring Clip	1

PART NO	S	DESCRIPTION	QTY
15-01-5000		Standard 72" Finished Headroom	1
15-01-9005		Cab To Module Sliding Pass-Thru Window	1
15-02-0000		Standard Perko Body Intake And Exhaust Vents (3-STD)	1
15-02-1600		1 Piece Stainless Steel Wheel Well Trim Rings (Small) 18.75" radius for Ford E-Series, F-Series, RAM, Chevy G-Series, and CK	1
15-02-2500		Standard Cast Fuel Fill Housing	1
15-CS-9902		Standard 3" Lowered Front Body Skirts F-Series & RAM Includes dual side entry door step well.	1
<b>***MODULE DOORS AND WINDOWS***</b>			
20-00-0100		2 Red Reflectors On Each Module Entry Door One Mounted At The Top And One Mounted At The Bottom.	1
20-00-0500		Combination Extruded/Pan Formed Module Entry Doors With Clean Seal #50512 Door Gaskets. Includes Stainless Steel Sill Plates. Non-Slip Tape on Side Entry Sill Plate	1
20-01-0000		Full Height Side Entry Door With Gas Style Hold-Open Position The Hold-Open At 90 Degrees.	1
20-01-1000		Side & Rear Entry Door Thresholds With Black/Yellow Safety Anti Slip Tape	1
20-01-2900		<i>Sliding Side Entry Door Window (Solar Cool Bronze Tint)</i> Sliding Window With Screen And Bronze Tint.	1
20-01-3500		Rear Doors With Grabber Style Hold-Opens	1
20-01-5400		Fixed Rear Entry Door Windows (Solar Cool Bronze Tint) With Bronze Tint Option.	1
20-01-9010		<i>Exterior Assist Handles On Side Or Rear Entry Door Not Included (Victoryliner)</i> Delete from Side & Rear Entry Doors	1
20-02-0000		Tri-Mark 030-18 Free Float Handles with Chrome Exterior and Black Pocket	1
20-02-1500		Primary & Secondary Exterior & Interior Rear Door Free Float Handles Standard	1
20-02-1600		Secondary Door Release Latches On All Entry Doors Label LH Arrow Label RH Arrow	1
20-02-2500		Shielded Cable Activated Module/Compartment Door Latches	1
20-02-3500		Cage Nuts On All Door Panels	1
20-02-4100		Smooth Aluminum Plate Lower Module Entry Door Trim Panels All Panels are to be ran through the sanding machine unless otherwise specified.	1
20-02-6000		Diamond Plate Side Entry Door Stepwell W/Sealed Seam Edges TYPE 1'S WILL HAVE DUAL SIDE ENTRY STEP STANDARD E & G Series with 3" Lower Skirt Specified will have Dual Side Entry Step	1
<b>***EXTERIOR COMPARTMENTS***</b>			
25-00-0100		SPECIAL NOTE TO DEALER Custom Compartment Options/Designs Not Listed In The Published Options List MAY Result In Additional Charges.	1
25-00-0200		2 Red Reflectors On Each Full Height Compartment Door One Mounted At The Top And One Mounted At The Bottom.	1



PART NO	S	DESCRIPTION	QTY
		One Reflector Mounted On Each Standard Height Compartment Door.	
25-00-0500		Combination Extruded/Pan Formed Compartment Doors With Clean Seal #50512 Door Gaskets And Stainless Steel Sill Plates. Includes Gas Style Hold-Opens Unless Otherwise Noted.	1
		Special Note To Production: Position All Gas Hold-Opens For Maximum Allowable Door Opening. Does Not Include Doors That May Hit Other Compartment Doors.	
25-00-0610		Smooth Aluminum Plate Exterior Compartment Door Panels	1
25-01-0000		Magnetic Compartment Door Switches	1
25-01-1000		Polyurethane Compartment Lining-Standard Gray	1
25-01-2500		Standard TecNiq Model E41 LED Strip Lighting Surface Mounted Compartment Lights One Strip To Be Installed Vertically Inside Door Frame Against Wall #1 Or #3 As The Standard.	1
		The Standard Light Lengths Used Are: 18" 31.5" 54" 72"	
25-01-3220		<b>18" TecNiq Model E41 LED Strip Lighting IATS For Exterior Compartment (Ea)</b> Specify Location(s): (2) P1, Opposite Side Of Standard.	2
25-01-3224		<b>31.5" TecNiq Model E41 LED Strip Lighting IATS For Exterior Compartment (Ea)</b> Specify Location(s): (1) D2, Opposite Side Of Standard.	1
25-01-3225		<b>54" TecNiq Model E41 LED Strip Lighting IATS For Exterior Compartment (Ea)</b> Specify Location(s): (1) D3, Opposite Side Of Standard.	1
25-01-3226		<b>72" TecNiq Model E41 LED Strip Lighting IATS For Exterior Compartment (Ea)</b> Specify Location(s): (1) P4, Opposite Side Of Standard. (1) D1, Opposite Side Of Standard.	2
25-01-3300		Black Texture Coated Aluminum Exterior Compartment Vents	1
25-04-3510		<b>Full Height Victoryliner Curbside Front IS/OS Compartment</b> P-1 compartment.	1
25-04-5500		1 Fixed And 2 Adjustable IS/OS Compartment PVC Shelves (1) Adjustable In The Upper Section. (1) Adjustable In The Lower Section.	1
25-04-7000		Cabinet Liner Lined Walls In The IS/OS Compartment	1
25-04-8010		<b>Victoryliner Curbside Front Battery Compartment</b> P-2 compartment.	1
25-05-3010		<b>167" Victoryliner Curbside Rear Backboard Compartment</b> P-4 Compartment Includes Fixed Vertical And Horizontal Divider.	1

PART NO	S	DESCRIPTION	QTY
		Install The Vertical Divider 9.5" from Wall #3 for Stryker Stair Chair Storage on the right side of the divider Install The Horizontal Divider On The Right Side of the divider 42" up from the floor  Compartment shall be deep enough for a Stryker Stair Chair	
25-05-3510		<i>Victoryliner Full Height Streetside Front Compartment</i> D-1 compartment.	1
25-05-5010		<i>Victoryliner Streetside Double Door Intermediate Compartment</i> D-2 compartment.	1
25-06-3510		<i>3/4 Height Single Door Streetside Rear Compartment</i> D-3 compartment.	1
25-11-8010		<i>Smooth Aluminum Adjustable Shelf W/ Ribbed Rubber Matting (Ea)</i> Smooth Aluminum With Standard 2" Lips. Specify Compartment: (2) P-4, IS/OS Area. (1) D2. (1) D3, Bottom of IS/OS Area.	4
25-12-5010		<i>Fixed Smooth Aluminum Shelf W/Ribbed Rubber Matting (Ea)</i> Smooth Aluminum With Standard 2" Lip Specify Compartment: (1) D-1, above O2 access window.	1
25-12-8000		<i>Add IS/OS Access To Exterior Compartment (Ea)</i> Specify Compartment: (1) D-3 into the Left Rear Base. (1) P-4, aisle facing Heavy Unframed Poly Door With Full Length Piano Hinge And M1 Latch.	2
25-12-9000		<i>Black Dri-Dek On Compartment Floor (Each)</i> Specify Compartment: D1, D2, D3, P4.	4
***REAR STEP AND BUMPER ASSEMBLY***			
30-01-0100		<i>Rear Bumper With Angled Style End Caps</i> Includes Standard Reinforced Corner Angle Supports & Aluminum Sub-Frame Bumper. Center Section And End Caps To Be At The Same Height.  Truss Head Style Phillips Screws Are To Be Used To Secure The Diamond Plate Bumper Pod To The Sub-frame  NOTE TO PRODUCTION: DO NOT INSTALL THE STD STAINLESS COVER AT THE BOTTOM OF FLIP UP STEP.	1
30-01-3500		Full Width Diamond Plate Rear Kick Plate ***IMPACT RAILS, STONE SHIELDS AND RUNNING BOARD***	1
35-01-0000		One Piece Body Side Panels With Aluminum Lower Impact Rails Includes Lower Impact Rails Only.	1

PART NO	S	DESCRIPTION	QTY
35-01-3000		<b>Diamond Plate Running Boards With Grip Strut</b> Grip strut welded into running board.	1
35-01-7000		<b>Whelen TOCACCCR Surface Mounted Running Board Lights (Pr)</b> 2" Lights Are Mounted With TFLANGEC Chrome Flanges. Includes Deutsche Connectors	1
35-01-7500		<b>Rear Mud Flaps With Metal Stabilizers</b> <b>DELETE THE METAL STABILIZERS</b>	1
35-01-9000		Stainless Steel Compartment And Entry Door Sill Plates	1
35-02-0000		Drip Rail Over Doors Specify ship loose, install or delete.  No credit available if deleted.	1
35-02-0900		Frame Rail Cover A Full Width Diamond Plate Frame Cover to Be Installed Between the Cab and the Module.	1
35-02-2500		36" High Front Stone Guards With Sealed Top Edge.	1
<b>***ELECTRICAL SYSTEM***</b>			
40-00-0550		<b>Elite G3 Touch Screen Electrical System</b> Includes: (1) Front Switch Panel, (1) Rear Switch Panel.  (2) Carling Switches "Includes Stainless Steel Guards" (1) Center Strip Lights (1) Momentary Disable Switch For Curb Side Scene Lights. Standard Location Is The R.F.S. Cabinet.  (1) Electric Oxygen with Regulator And Oxygen Display. Regulator Mounted On A Bracket Remote From The Oxygen Tank. Includes High Pressure Hose From The Tank To The Regulator.  (3) Power Point Studs - They Will Include A Full-time Hot, Battery On (Ignition Hot), & Ground. These Are Rated 20 AMPS Or Less. Dealer To Specify Location: Aux Electrical  (1) Back-Up Camera Black (ASA VCMS24B) (This Camera Will Always Be Displayed Thru The Elite Front Touch Screen  Dome Lights On Low With Entry Door. (On High Is Not An Option)  The R.F.S. Switch May Turn On the Dome Lights On High or the Center Strip Lights. Specify:  Inverter Will Come On With Ignition If One Is Specified, Along With Button Provided On Switch Panel.	1
40-01-0320		<b>Add Rear Touch Pad (Elite System)</b> Specify Mounting Location: Head End of Curbside Below Bandage Cabinet.  Includes: (1) Rear Display Screen For O2, Temp & Fan Speed	1

PART NO	S	DESCRIPTION	QTY
40-01-2000		Reverse Activated Alarm With Momentary Auto Reset Switch ECCO #575 Alarm.	1
40-01-5000		<b>Super Auto Eject Shoreline - 20 Amp</b> Specify Location: Above D-2 Specify Inlet Cover Color: White Stainless Shoreline Access Plate - #LL1601SS  <b>SPECIAL NOTE ABOUT 115 VOLT CURRENT DRAW (AMPS)</b> This Unit Has A 20 Amp Shoreline Inlet That At A Capacity Rating Of 125% Has A Maximum Amperage Load Of 16 Amps. This Unit As Ordered Has A Total 115 Volt Amp Draw Of ** Amps. This Leaves A Reserve Of ** Amps For Interior Outlets. This DOES NOT Include Any Customer/Dealer Installed Equipment.	1
40-01-6900		<b>**FACTORY USE ONLY**</b> Shoreline Inlet Adapter Plug Present.	1
40-02-3500		<b>Vanner LSC12-1100 1100W Inverter With Display Includes 55 Amp Battery Charger</b> Specify Remote Charger Display Location: Above Shoreline Specify Remote Inverter Display Location: Action Area  Installing Displays on any part of the exterior of the unit, Voids all Warranty issues from Vanner & Life Line.	1
40-03-0000		Action Area Dual 2.4 amp USB Charger And 20 amp 12v Outlet Full Time Hot Circuit.	1
40-03-2000		R.F.S. Cabinet Dual 2.4 amp USB Charger And 20 amp 12v Outlet Mounted In The Lower Section On Wall #1. Full Time Hot Circuit.	1
40-03-6000		Action Area 125 Volt Standard Style Hospital Grade Outlet	1
40-03-7000		R.F.S. Cabinet 125 Volt Standard Style Hospital Grade Outlet Mounted In The Lower Section On Wall #1.	1
40-03-8500		<b>Add 125 Volt Standard Style Hospital Grade Outlet (Ea)</b> Specify Location: Above squad bench head end cabinet All Cab Floor Requested Installs will Include Weatherproof Cover, Unless Otherwise Specified.	1
40-03-8611		<b>Add Dual 2.4 amp USB Charger And 20 amp 12v Outlet</b> Full time hot circuit Specify Location: Above squad bench head end cabinet	1
40-04-4000		Power Door Locks For Side Entry & Rear Entry Doors	1
40-04-4500		<b>Additional Power Door Lock (Ea)</b> Door Locks Are Thermally Protected With Pulsed Signals. Specify Compartment Location: P1 Doors that are less than 14" wide and/or less than 12" high will need part #40-04-4505. These are doors that have a Pass Thru width of 9" with hold open and height of 10" (side hinge door).	1

PART NO	S	DESCRIPTION	QTY
40-04-6000		Hidden Switch In Rear License Plate Housing (Unlock Only) Unlocks Cab & Module For RAM, G-Series & Freightliner Unlocks Modules Only For E & F Series Unlocks Cab & Module For International When Cab is Running Only	1
40-05-1495		12 Volt Power And Ground Circuit For Flashlight (Victoryliner) Specify Location:  5amp circuit ea.	1
***INTERIOR LIGHTING***			
45-01-0000		Oxygen Compartment Light	1
45-01-0500		Side Entry Door Stepwell 3" Round LED Light Whelen 3" Round Super-LED Surface Mounted	1
45-01-1510		8 Ceiling Lights Tecniq 8" LED Neutral White Frosted Dome With Chrome Trim 4-Streetside 4-Curbside TecNiq# E08-LC00-1	1
45-01-3000		TecNiq LED Action Area Light E32-L00S-1 14" Light	1
45-01-7530		4-Tecniq Rectangular Low Profile LED E30 "LED" Center Strip Lights ILOS Model # E30-L0S0-1 This Light Includes A Switch On The Light.	1
***EXTERIOR LIGHTING***			
50-01-0001		Whelen M6 Series "LED" Stop/Tail Lights (Pr) #M62BTT Includes M6FC Chrome Flange Mounted Above The Rear Kick Plate.	1
50-01-6001		Whelen M6 Series "LED" Amber Turn Lights (Pr) #M62T Includes M6FC Chrome Flange Mounted Above The Rear M6 Series LED Stop/Tail Lights. They shall flash sequentially in the direction of the arrow.	1
50-02-9000		C.P.I. License Plate Housing	1
50-02-9501		Whelen M6 Series LED Back-Up Lights (Pr) #M62BU Includes M6FC Chrome Flange Mounted Above The Rear Turn Lights Unless Otherwise Specified.	1
50-03-4901		Whelen Two Reverse Activated M92SLC Rear Load Lights	1
50-03-8401		Whelen M92SLC Side Scene Lights (Two Each Side)	1
50-03-9000		Right Side Scene Lights On With Open Side Entry Door	1
50-04-2000		Rear Side Scene Lights On In Reverse IATS	1
50-04-5000		Wire Rear Emergency Light To Brake Circuit IATS Specify Light Location: Rear Window Level Lights.  The brake light override feature shall function during all modes of lighting operation. The	1

PART NO	S	DESCRIPTION	QTY
		lights shall steady burn when the brake pedal switch is activated even when the emergency lighting is turned off. When the warning lights are in primary or secondary mode, then the rear lights specified above shall steady burn for the duration of the foot pedal depression and resume flashing when the foot brake is released.	
50-04-7500		Federal Commander COM1 "LED" ICC Marker Lights (2) COM1MC-A=Amber (6) COM1MC-R=Red	1
50-04-8000		Innovative Lighting Slimline Rear DOT/Brake Light Mounted Above The Rear Doors. Mounted Above The Drip Rail Unless Otherwise Specified. Mid Sections To Be Wired Thru The Brake Light Circuit.	1
		<b>***RADIO PROVISIONS AND AIR HORNS***</b> Pricing does not include installation of customer supplied radio equipment unless otherwise stated. All customer supplied radio equipment must be received at Life Line prior to construction start date.	
55-01-3020		<b>10"/12" Buell Strombos Air Horns Thru Bumper Valance F-Series w/Compressor</b> Includes: Standard Duty Compressor Specify Compartment For Compressor Location: D-2 - Lower Section, Wall #1 NOTE: There Is An Additional Charge If The Compressor Is Not Mounted In A Compartment. Vortex Aluminum "L" shelf if needed and Mesh Cover Over Pump One Standard Frame Mounted Air Tank (1) 10" Air Horn (1) 12" Air Horn Push Button Button Location: Driver Side of console on the front top flat area to the left of the suspension dump warning light.	1
55-01-8500		<b>KE-794 Antenna Base With Coax</b> Specify Termination Location: (1) Front Module Roof To The Driver's Seat Base. Coil, Zip Tie & Tag Include rain caps on all module roof antenna bases	1
55-02-1500		<b>KE-794 Module Roof Antenna Base/Coax (Ea)</b> Specify Termination Location: (1) Mid Module Roof to AUX Electrical. Label "Spare". (1) Rear Module Roof to behind the drivers seat base. Coil, Zip Tie & Tag Include rain caps on all module roof antenna bases	2
55-02-6500		<b>Install Customer Supplied Radio Cables (Ea)</b> Specify Routing And Termination Location: (1) Aux Electrical to behind the action area switch panel (1) Aux Electrical to the Front Console	2
		<b>CABLES MUST BE AT LIFE LINE PRIOR TO CONSTRUCTION START.</b> Ship to: Life Line Emergency Vehicles 1021 West 1st Street Sumner, IA 50674	

PART NO	S	DESCRIPTION	QTY
		<b>**NO EXCEPTIONS**</b> <b>ALL CABLES MUST BE MARKED FOR ORIGIN AND TERMINATION.</b> <b>ANY CABLE THAT IS NOT MARKED WILL NOT BE INSTALLED.</b> <b>**NO EXCEPTIONS**</b>	
		<b>***SIRENS AND EMERGENCY LIGHTING***</b>	
60-01-1050		<b>Carson SA-441-17F MAGFORCE Dual Amplifier Siren System w/Permanant Mic ILOS</b> <b>MEETS 49 STATE REQUIREMENTS</b>	1
		NOTE: THIS HAS THE MECHANICAL TONE IN THE SIREN.	
60-01-4510		<b>CPI Thru Bumper Siren Speakers (F-Series) w/OEM Fog Lights</b> <b>SAD3833-23FSD-1</b> <b>SAP3834-23FSD-1</b>	1
60-01-9001		<b>4 Whelen M9 Series "LED" Side Module Warning Lights</b> <b>Part # M9R</b> <b>Includes M9FC Chrome Flange</b> <b>Mount The Side Lights Inline.</b>	1
		Flash Pattern: MODUFLASH On in Primary and Secondary unless otherwise specified:	
60-02-9501		<b>2 Whelen M9 Series "LED" Rear Module Warning Lights</b> <b>Part #M9R</b> <b>Includes M9FC Chrome Flange</b>	1
		Flash Pattern: MODUFLASH On in Primary and Secondary unless otherwise specified:	
		X PATTERN FLASH WITH WINDOW LEVEL M9	
60-03-3001		<b>1 Whelen M9 Series "LED" Center Rear Module Warning Light</b> <b>Model # ILOS: M9R Red LED/Red Lens</b> <b>Includes M9FC Chrome Flange</b>	1
		Flash Pattern: MODUFLASH On in Primary and Secondary unless otherwise specified:	
60-04-4610		<b>Emergency Lights On In Reverse</b> <b>Specify which Button on the touch screen or flasher circuit is to be activated.</b> <b>SECONDARY.</b>	1
60-04-5271		<b>2 Whelen TLI* ION T-Series Linear Super-LED Grille Lights w/Chrome Flange</b> <b>Includes TIONFC Chrome flange</b> <b>Specify Color:</b> <b>R - Red</b> <b>Flash Pattern: MODUFLASH</b> <b>On in Primary and Secondary</b> <b>X PATTERN FLASH WITH LOWER GRILLE</b>	1

PART NO	S	DESCRIPTION	QTY
60-05-0494		2 Whelen M7 Series "LED" Intersection Lights (Type I) Part #M7R Red LED/Red Lens Includes M7FC Chrome Flange  Flash Pattern: MODUFLASH  On in Primary and Secondary	1
60-06-6001		2 Whelen M7 Series "LED" Rear Wheel Well Lights Part #M7R Red LED / Red Lens Includes M7FC Chrome Flange  On Pri/Sec.  Specify Flash Pattern: MODUFLASH	1
60-07-1540		7 Whelen M9 Series "LED" Front Module Warning Lights Color Lens Specify Whelen Part #: FRONT WALL LAYOUT  R/R/C/R/C/R/R All Pri/Sec. (5) M9R Red LED / Red Lens - Positions 1,2,4,6,7. (2) M9C - Positions 3,5. Includes M9FC Chrome Flange  Flash Pattern: MODUFLASH.	1
60-09-4455		2 Whelen TLI* ION T-Series Linear Super-LED Grille Lights Chrome Flange Includes TIONFC Chrome flange Specify Color: R - Red Flash Pattern: MODUFLASH On in Primary and Secondary X PATTERN FLASH WITH UPPER GRILLE	1
60-10-0160		Rear Window Level Whelen M9 Red Or Amber Or Blue Or Clear "LED" Lights (2) Specify Color: M9R Red LED / Red Lens Includes M9FC Chrome Flange  X PATTERN FLASH WITH UPPER OUTER M9'S  Set To Brake Override	1
60-11-4400		Whelen ULF44 LED Flasher 4-Outlet 60 Watts (Ea) ***PATIENT COMPARTMENT***	1
65-00-0100		Standard Solid Surface Construction Interior Cabinets	1
65-00-9900		SPECIAL NOTE TO DEALER Custom Cabinet Options/Designs Not Listed In The Published Options List MAY Result In Additional Charges.	1
65-01-2000		Standard Smooth Headliner	1
65-01-3500		1/4" Gray Tinted Polycarbonate Sliding Doors On Cabinets Includes Brushed Finish Interior Trim.	1
65-02-2240		"Dealer/Customer Supplied Package" Stryker Power or Performance Load System Power Load	1



PART NO	S	DESCRIPTION	QTY
		<b>REQUIRED Specify Serial Number of Supplied Stryker System</b> <b>S/N:</b> <b>Will Be Center Mount Unless Otherwise Specified</b> <b>Includes:</b> <b>Floor Structure - Tapping Blocks</b> <b>Includes:</b> <b>Life Line Supplied Power &amp; Performance Load Floor Plate Kit #639007000100 (Needs to</b> <b>Include Track Cover)</b> <b>Wire with 10 Gauge Power and Ground with a 15 Amp Circuit Breaker Powered by Battery</b> <b>Hot Power.</b> <b>The Power And Ground Is Run To Inside The Track, Or To Trolley If Supplied.</b> <b>Complete 6390 Power or 6392 Performance Load System Installed</b> <b>Be sure to leave main power switch in the off position.</b> <b>Will Be Center Mount Unless Otherwise Specified</b> <b>Does NOT include cot.</b> <b>Includes Std. Life Line Push Rail Floor Mount Stryker Part# 6360-030-11</b> <b>Does Not Include Push Rail</b>	
65-02-7500		L.R.O. Cabinet With Sliding Polycarbonate Door Includes (1) Adjustable PVC Shelf Each Section	1
65-03-2500		Cabinet Above The Side Seat With Sliding Polycarbonate Door	1
65-03-7001		Victoryliner L.F.O. Cabinet With Sliding Polycarbonate Door Includes [1] Adjustable PVC Shelf in Each Section	1
65-04-1000		<b>Left Rear Base Cabinet With Sliding Polycarbonate Door</b> <b>Includes (2) Adjustable PVC shelves</b> <b>IS/OS Access To D-3.</b>	1
65-04-6610		Telemetry Area Cabinets Not Included (Victoryliner)	1
65-04-8510		Action Area Cabinet With Side Hinged Frameless Heavy Polycarbonate Door (2) Hinged polycarbonate doors. Includes (2) Adjustable Shelves	1
65-05-0001		<b>Victoryliner Slanted Action Area Switch Panel</b> <b>Includes a ABS Removable Panel With Elite Screen Mounted In The Panel.</b>	1
65-05-4510		Side Facing CPR Seat w/Contour ERGO Back & 4-Pnt Belt w/Hinge Lid (Victoryliner) Includes Black IMMI 4-Point Seat Belt.	1
65-05-8505		<b>Rear Facing Valor Vac Attendant Seat w/Child Safety Seat On Pedestal/Swivel</b> <b>Valor Vac Seat with Child Safety Seat &amp; Life Line Logo</b> <b>Includes 4-Point Belt</b> <b>Question: Will there be an O2 Bottle Attached to the Head of the Cot? Yes</b> <b>Requires Lower Streetside Aisle Cabinet And Bulkhead Wall Cabinet</b> <b>For Overflow Electrical Equipment.</b>  <b>Position the seat the same as 5471</b>	1
65-05-9795		<b>Delete Contoured ERGO Backrest/IMMI 4 Point Seatbelt (Ea)</b> <b>Delete 1 from Squad Bench area due to head end cabinet</b>	1
65-06-2000		Rear Facing Electrical Cabinet And Door Vent Accordingly	1

PART NO	S	DESCRIPTION	QTY
65-07-0000		<b>Right Front Upper ALS Cabinet With Solid/Polycarbonate Doors</b> Solid Surface Doors With Vented Polycarbonate Inserts. Dual C5 Latches	1
65-07-3000		<b>Right Front Lower ALS Cabinet With Solid/Polycarbonate Doors</b> Solid Surface Door With Vented Polycarbonate Inserts. Dual C5 Latches	1
65-07-5300		Top R.F.S. Cabinet W/Top Hinged Solid Door ILOS Heat/AC Includes Gas Style Hold-Opens.	1
65-07-5410		Top R.F.S. Cabinet (Ducted Heat/AC In Ceiling Pkg Discount) Includes Gas Style Hold-Opens.	1
65-07-9010		<b>Victoryliner Lower Walk-thru Cabinet w/2 Solid Doors &amp; M1 Latch on Each Door</b> Includes: Solid Surface Counter Top Area. 1 Adjustable Shelf	1
65-08-0000		CS Squad Bench w/Contoured ERGO Backrests w/2 Piece Lid & No Divider Includes 3 Sets Of Black IMMI 4-Point Seat Belts Includes 3 Cot Restraints & Retractors.	1
65-08-3810		<b>Victoryliner Cabinet At Head End Of The Right Side Bench</b> Includes: Counter Top Without Lip. (1) Drawer Facing The Bench Side includes 3 adjustable/removable poly dividers (1) Tip Out (Std) Waste cot facing (1) Tip Out (8970) Sharps cot facing	1
65-08-8500		Squad Bench Headrest Cushion	1
65-09-1500		<b>Two Section Bandage Cabinet With Sliding Polycarbonate Doors</b> Specify Cabinet Depth: 8.25" H X 10" D.	1
65-09-6110		<b>Latching Triple Glove Box Holder w/Clear Lid In Cushion Area Above Doors(Ea)</b> Recessed Storage Box With Top Hinged Clear Latching Polycarbonate Door. Specify Location: Above Side Entry Door	1
65-09-8500		100" Long Formed Streetside Ceiling Grab Rail	1
65-09-9500		100" Long Formed Curbside Ceiling Grab Rail	1
65-10-0500		Formed "L" Door Assist Rails Mounted On The Hinge Side	1
65-10-2000		<b>Formed Assist Rail At The Head End Of The Squad Bench</b> 12" Rail	1
65-10-2500		Formed Assist Rail On The Left Rear Wall 12" Assist Rail Is Std. Size.	1
65-10-5000		Two C.P.I. #IV2008 Rubber Recessed IV Brackets Mounted In The Mid/Rear Cot Position.	1
65-10-9000		<b>Southco M1 Stainless Cabinet Latches</b> Will have C5 latches to meet "K" Spec. on all doors except Poly Doors.	1

PART NO	S	DESCRIPTION	QTY
65-12-2810		<b>BRG LED Digital Clock Mounted In Rear Head Cushion</b>	1
65-12-4100		Locking Cabinet Door With Simplex Push Button Lock (Ea) Specify Cabinet Location (s):	1
65-13-1600		Slide Out Sharps And Waste BioWaste Drawer Trash Specify Cabinet Location:	1
65-15-0027		<b>Interior Laminate: Fashion Gray High Gloss D381-01</b>	1
65-17-0269		<b>Seam Sealed Cushions "Federal K-Spec" Vinyl: DA-324 Gunmetal (Medium Gray)</b> This Vinyl May Be Sent To EVS For Back Rests & Medi-Vac Seating For Exact Matches.	1
65-17-0402		<b>ERGO Backrest Seamless/Medi-Vac Vinyl Color: Gunmetal MV102 (Medium Gray)</b>	1
65-17-0608		<b>Valor Vac-Form Vinyl Color: Gunmetal (Medium Gray)</b>	1
65-18-0001		<b>Welting Between Cabinets: Dark Gray</b>	1
65-19-0011		<b>Counter Tops (Main): Platinum</b> Standard with 1" Lip	1
65-20-0005		<b>Counter Tops (Accent Stripe): Glacier White</b>	1
65-21-0009		<b>Lonseal Floor Selection: Loncoin II Flecks #150 Onyx</b> Specify:  Rolled Up 4" On Both Sides Unless Otherwise Specified.	1
65-CS-1020		<b>Add Flat Cabinet For The 2nd Rear Switch Panel</b> Mounted At The Head End Of The Squad Bench Below The Bandage Cabinet. (Requires 8" Deep Bandage Cabinet).	1
65-CS-3000		<b>Total Available Seating Positions In this Unit</b> Including Cab, Module And Cot	7
<b>***PATIENT COMPARTMENT ENVIRONMENTAL SYSTEMS***</b>			
70-01-0000		Static Module Fresh Air Intake Vent	1
70-01-1000		12 Volt Powered Exhaust Fan	1
70-01-2320		Ducted Hoseline Center Mounted Heat/AC Location (Victoryliner Pkg) Includes Center Evaporator/Heater Core Location. Includes #65-07-5300 Top Hinged Top R.F.S. Cabinet. Evaporator Model #ACHU1158	1
70-01-2400		Inline Booster Coolant Pump 12 Volt Centrifugal Pump To Boost The Flow Capacity Of The Coolant System.	1
70-01-4520		Hoseline Front Wall Mounted Aux 12 Volt A/C Condenser (Victoryliner Pkg) Condenser Model #TMC2007	1
70-01-6000		Yellow Certifoam High Density Insulation Body/Floor/Doors (R-6) GAS CHASSIS' INCLUDE HEAT BARRIER THIS GOES ON THE HEAT SHIELD THAT GOES OVER THE AXLE. THIS ALSO GETS THE THERMO HEAT INSULATION BLANKET ON THE BOTTOM OF THE FLOOR AND GOES FROM THE FRONT OF THE MODULE TO THE FUEL TANK.	1
70-01-6600		Automotive Grade Undercoating Under Module Body <b>***OXYGEN SYSTEM***</b>	1

PART NO	S	DESCRIPTION	QTY
75-01-0000		Ohio Style Action Area Oxygen Outlet	2
75-01-4000		Ohio Style Right Wall Mounted Oxygen Outlet	1
75-01-8000		Interior Oxygen Access/Viewing Door ACCESS DOOR WILL BE POLYCARBONATE FRAMED DOOR UNLESS OTHERWISE SPECIFIED.	1
75-01-8600		<i>"M" Oxygen Tank Bracket In Streetside Front Compartment</i> Mount on Wall #2, close to Wall #3.	1
75-02-3710		<i>Drill Mounting Plate For Both "H" or "M" Tank For O2 Bracket</i> Set up for "M" tank at delivery.	1
75-03-3000		<i>ZICO Velcro Portable Oxygen Tank Straps (Pr)</i> Specify Location: Ship Loose.	2
***SUCTION SYSTEM***			
80-01-0000		12 Volt Gast Suction Pump Controlled By Switch on Switch Panel	1
80-01-1505		1 Ohio Style Recessed Suction Area Suction Outlet Includes Quick Disconnect For Outlet Hose Barb Must Fit The Suction Hose	1
80-01-1505		1 Ohio Style Recessed Suction Area Suction Outlet Includes Quick Disconnect For Outlet Hose Barb Must Fit The Suction Hose	1
80-01-7500		SSCOR 22000 Suction Unit W/23002 Disposable Trap Set Includes Flush Mounted Action Area Panel And Disposable Trap Set.	1
80-01-8500		Recessed Suction Unit Below Action Area Includes a 3/4 Height Solid Surface Door with Canister Mounted on Door Unless otherwise specified.  25-CS-0510 Required if Affects Exterior Compartment.	1
***PAINT***			
85-00-0100		Standard AkzoNobel Paint Process Includes 6 Year Pro-Rated LL Paint Warranty.	1
85-00-0215		<i>Drawings to Show Paint &amp; Graphics Required (Includes 2 Drafts)</i>	1
85-01-0500		<i>Repaint Chassis ILOS O.E.M. White (Type I or Highliner)</i> Specify Color: MATCH PREVIOUS Red #FLNA32192.	1
		SEND OUT NEW SAMPLES Touch-Up Paint Is Included For Colored Chassis.	
85-01-1500		<i>Paint Module Body Other Color ILOS O.E.M. White</i> Specify Color: MATCH PREVIOUS Red #FLNA32192.	1
		SEND SPRAY SAMPLE TO CUSTOMER FOR APPROVAL Touch-Up Paint Is Included For Colored Module Body.	
85-01-2500		<i>Standard 11" Beltline Stripe (Does Not Cross The Hood)</i> Specify Color: Match Previous White #NAV9318	1
85-01-5500		<i>Add Upsweep To Beltline Stripe</i> Match Beltline Stripe Color. Reference 5471	1

PART NO	S	DESCRIPTION	QTY
85-02-9000		<b>Custom Three-Tone Paint</b> Specify Location And Color: MATCH WHITE #NAV9318 ROOF AND DOWN TO DRIP RAILS.  MATCH Red #FLNA32192.  MATCH LAST UNIT 5471 2" GRAY PAINT #FLNA7057 STRIPE ABOUT MID BODY AND SLIGHT UPSWEEP.  SEND OUT PAINT SAMPLES FOR APPROVAL	1
85-02-9500		Do Not Paint The Nader Pins/Install After Paint Process	1
85-02-9585		<b>Paint AC Condenser Cover</b>	1
85-03-3500		<b>1" Scotchlite Striping (Per Foot)</b> Specify Color And Location: WHITE REFLECTIVE. Ref. 5471	60
85-03-4500		<b>4" Scotchlite Striping (Per Foot)</b> Specify Color And Location: WHITE REFLECTIVE. Ref. 5471	60
***EMBLEMS AND DECALS***			
90-01-0500		<b>Install Roof "SOL" Decal Only (Delete All Other Decals)</b>	1
90-01-1100		"NO SMOKING" - "FASTEN SEAT BELT" Decals 1-Installed In The Cab. 1-Installed In The Module.	1
90-01-1200		No Other Decals or Lettering Included Unless Specified Below	1
90-01-2000		<b>Two 18" Shadowed Star Of Life Decals</b> SIDES TO BE WHITE/GRAY SCOTCHLITE SOL'S. Ref. 5471	1
90-01-5100		<b>Install 3/4" White Reflective Tape Around Side And Rear Entry Doors</b> K-Spec-F Certification Requirement.	1
90-01-6500		<b>4" Scotchlite Reflective Lettering (Ea)</b> Specify Color And Font: MATCH LAST UNIT COLOR AND FONT Color: 3M 7725-41 Specify Lettering Location: "AMBULANCE" ON BUG SHIELD SHADOWED, SEE LAST UNIT #5471	18
90-01-7000	S	<b>7" Scotchlite Reflective Lettering (Ea)</b> MATCH 5471 COLORS AND FONT Color: 3M 7725-41  SIDES AND REAR SHADOWED  "BERLIN EMS" "AMBULANCE"  "92" - NUMBER TO BE ON FRONT FENDERS BELOW A POST.	116

PART NO	S	DESCRIPTION	QTY
90-DL-0100	S	Custom Emblem Or Decal Option Specify Custom Option: QRS HEARBEAT Reference 5471	14
95-DC-LL01	S	Stryker Power Load Specify Custom Option: Dealer Supplied Stryker Power Load  This will need to be paid for when it arrives at Life Line prior to the start of production of the ambulance build. Customer will be invoiced for this when it arrives at Life Line.  **Dealer/Customer Supplied Parts Must Be At Life Line At the time of Released Order ** Ship To: Life Line Emergency Vehicles 1021 West 1st Street Sumner, IA 50674 **NO EXCEPTIONS** ** All Parts Must Be Clearly Marked With City and State ** **NO EXCEPTIONS** ** All Parts Must Include Any Documents, Components, or Hardware Needed For Installation ** **NO EXCEPTIONS**	1
95-DC-LL02	S	Stryker Power Pro 2 Cot (Hi-Config) Specify Custom Option: Dealer Supplied Stryker Power Pro 2 Cot (Hi-Config)  This will need to be paid for when it arrives at Life Line prior to the start of production of the ambulance build. Customer will be invoiced for this when it arrives at Life Line.  **Dealer/Customer Supplied Parts Must Be At Life Line At the time of Released Order ** Ship To: Life Line Emergency Vehicles 1021 West 1st Street Sumner, IA 50674 **NO EXCEPTIONS** ** All Parts Must Be Clearly Marked With City and State ** **NO EXCEPTIONS** ** All Parts Must Include Any Documents, Components, or Hardware Needed For Installation ** **NO EXCEPTIONS**	1
95-DL-0100	S	Delivery Specify Custom Option:  ***END OF QUOTE/PRODUCTION ORDER***	1
95-SP-0100		1 Original & 1 Revision Work Order Before Penalty Pricing 1 Original Draft & 1 Revision Draft Work Order Before Penalty Pricing. The Revision Rate Is \$175.00 Per Hour With 1 Hour Minimum Charge.	1
95-SP-0200		1 Original & 1 Revision Drawing Before Penalty Pricing 1 Original Draft & 1 Revision Draft Drawing Before Penalty Pricing. The Revision Rate Is \$175.00 Per Hour With 1 Hour Minimum Charge.	1
95-SP-0600		Change After Sign-Off (Published Price + 50%)	1

PART NO	S	DESCRIPTION	QTY
95-SP-0700		Change After Production Start (Published Price + 75%)	1
95-SP-0800		Change After Production Completion (Published Price + 100%)	1
95-SP-0850		Life Line Indemnification Statement	1
		The purchaser agrees to defend, indemnify and hold Life Line harmless from any claims, costs (including actual attorneys' fees), damages and liabilities caused in whole or in part by alteration or modification of, or changes or additions to the purchased products or use of product purposes it was not designed or intended for.	
		<b>***SIGNATURE-LIFE LINE EMERGENCY VEHICLES***</b>	
		This Is A Contract Between Life Line Emergency Vehicles And The Franchised Distributor Entering The Order. No Agreements Verbal Or Written Arrived At Between The Selling Distributor And The Purchasing Agency Not Listed On This Order Are Binding Upon Life Line Emergency Vehicles.	
		Life Line Emergency Vehicles reserves the right to request a surcharge on the price in the event of an increase in its costs resulting from any significant increases in cost of production, introduction of Government taxes on manufacturing, or any other circumstances beyond Life Line Emergency Vehicles' control and affecting the ambulance manufacturing industry in general. All adjustments shall become affective thirty (30) days following Life Line Emergency Vehicles' written notice of such surcharge. If Buyer is unwilling to accept any such surcharge, Buyer shall have the right to terminate this agreement within such thirty (30) day period.	
		THE VEHICLE IS BUILT TO THIS PRODUCTION ORDER. IT IS THE DISTRIBUTORS RESPONSIBILITY TO ASSURE THE VEHICLE MEETS THE CUSTOMER SPECIFICATIONS.	
		***** THE CHASSIS & DEALER SUPPLIED STRYKER POWER LOAD & POWER COT WILL BE INVOICED TO THE CUSTOMER WHEN THEY ARRIVE AT LIFE LINE PRIOR TO THE START OF PRODUCTION OF THE AMBULANCE BUILD. THE INVOICES WILL NEED TO BE PAID WITHIN 30 DAYS. THESE PAYMENTS WILL THEN BE DEDUCTED FROM THE FINAL INVOICE WHEN THE AMBULANCE IS COMPLETED. *****	
		Date Of Order: SPECIFY	
		Franchised Distributor: Jefferson Fire & Safety, Inc.	
		Quote Number: SPECIFY	
		Ordered By: _____	
		Total	365,609.00
		APPROVED :	
		DATE :	

**FOSTER COACH SALES, INC.**

903 Prosperity Drive Street P.O. Box 700  
Sterling, Illinois 61081

Phone: (815) 625-3276

(800) 369-4215

Fax: (815) 625-7222

Web site: www.fostercoach.com

SF00873

## QUOTATION

TO: BERLIN EMS  
108 N CAPRON STREET  
BERLIN, WI 54923

DATE: 02/20/25

ATTN: Evan VandenLangenberg

REFERENCE: HORTON 623

We are pleased to submit the following quotation in accordance with your request and subject to the Terms and Conditions listed below and on the reverse side hereof.

QTY.	DESCRIPTION	EACH	NET PRICE
1	2026 (Or current MY) FORD F-550 4X4, 193, GAS on a custom Horton Conversion Model 623 173" with 72" HR	\$ 325,583.00	\$ 325,583.00
1	INSTALL CUSTOMER SUPPLIED POWERLOAD SYSTEM	\$ 1,700.00	\$ 1,700.00
1	WAYPOINT SPOTLIGHT MODEL #44910	\$ 184.00	\$ 184.00
1	GRAPHICS, LETTERING, AND REAR AND INTERIOR PANEL CHEVRONS		
<i>does Not include New cot and power Load</i>			
<i>See attached quote</i>			
		\$ Total	\$ 327,467.00 + 79,446.92 <u><del>#</del> 397,913.92</u>
ACCEPTED BY: _____			
TITLE: _____ Date: _____			


ESTIMATED DELIVERY:  
800-900 DAYS PENDING BACKLOG

PROPOSED BY: \_\_\_\_\_  
SHAWN FOSTER, REGIONAL SALES MANAGER





FORD CHASSIS

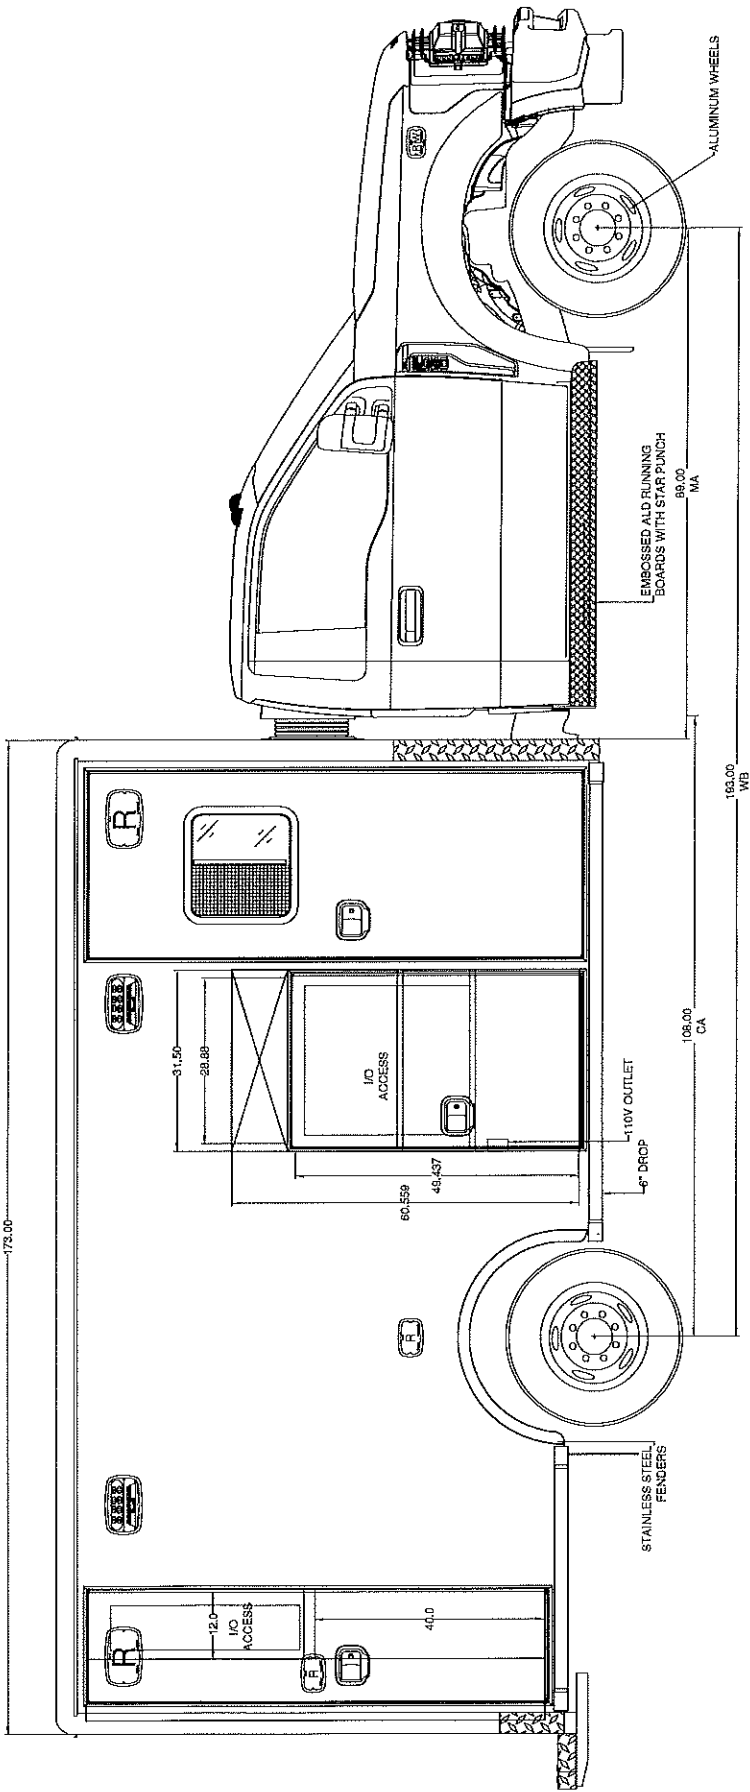


COMPT	INSIDE WIDTH	INSIDE HEIGHT	INSIDE DEPTH	CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT
CS REAR	22.70	80.13	21.36	18.09	79.16
CRASH B.	31.50	60.66	21.36	28.87	49.44

NOTE: DRAWINGS ARE FOR GRAPHICAL REPRESENTATION ONLY  
DIMENSIONS ARE APPROXIMATE & MAY VARY DURING CONSTRUCTION

PROPOSAL DRAWING

FORD CHASSIS


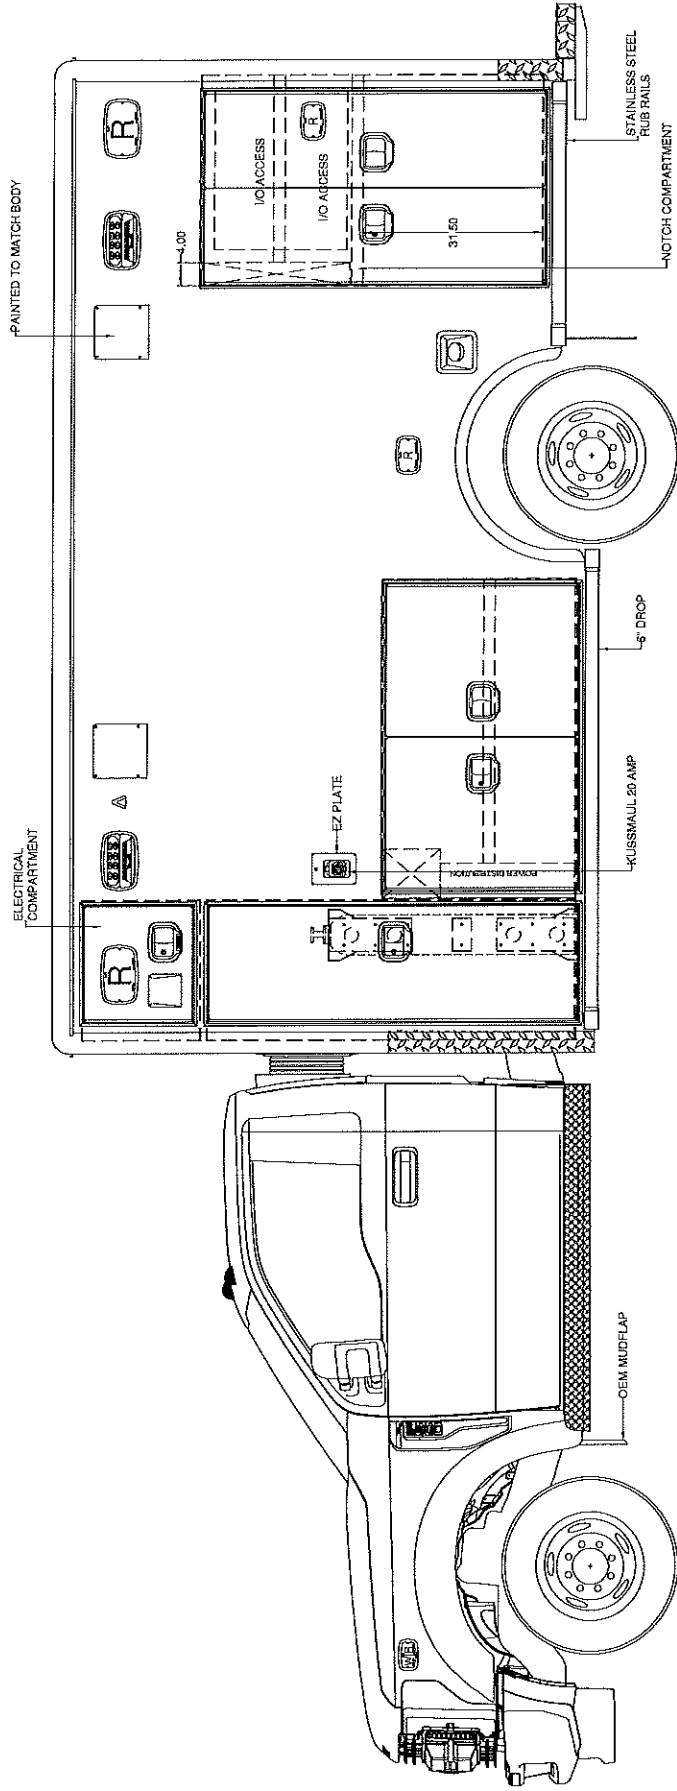


COMP.	INSIDE WIDTH	INSIDE HEIGHT	INSIDE DEPTH	CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT
SS FWD	24.25	64.13	20.36	18.74	63.16
SS INT	55.50	33.50	20.36	51.80	32.37
SS REAR	36.63	59.50	20.36	32.09	58.37

NOTE: DRAWINGS ARE FOR GRAPHICAL REPRESENTATION ONLY. DIMENSIONS ARE APPROXIMATE & MAY VARY DURING CONSTRUCTION.

PROPOSAL DRAWING

FORD CHASSIS

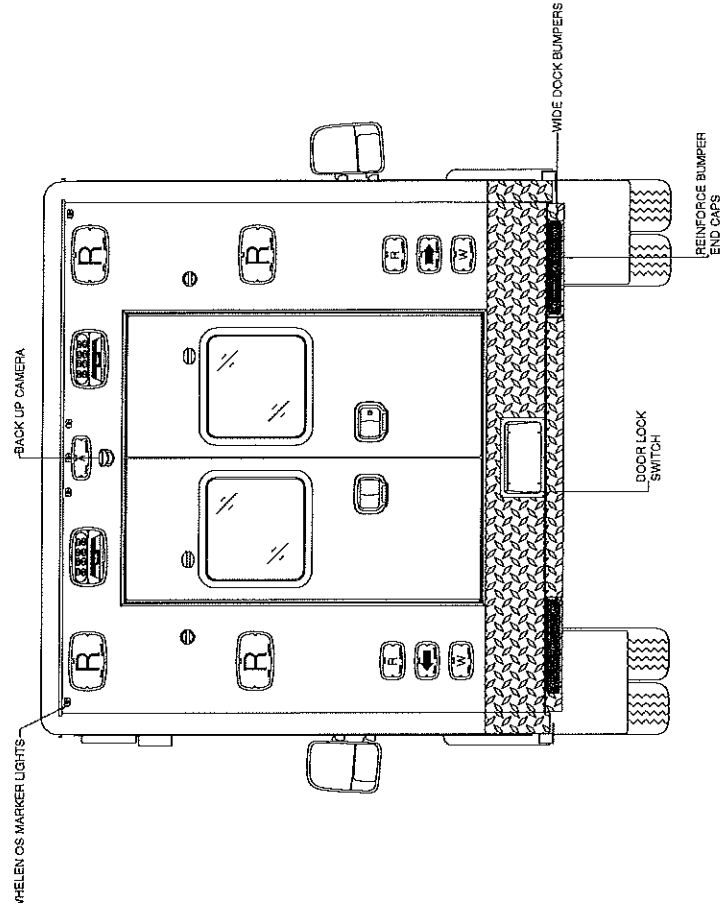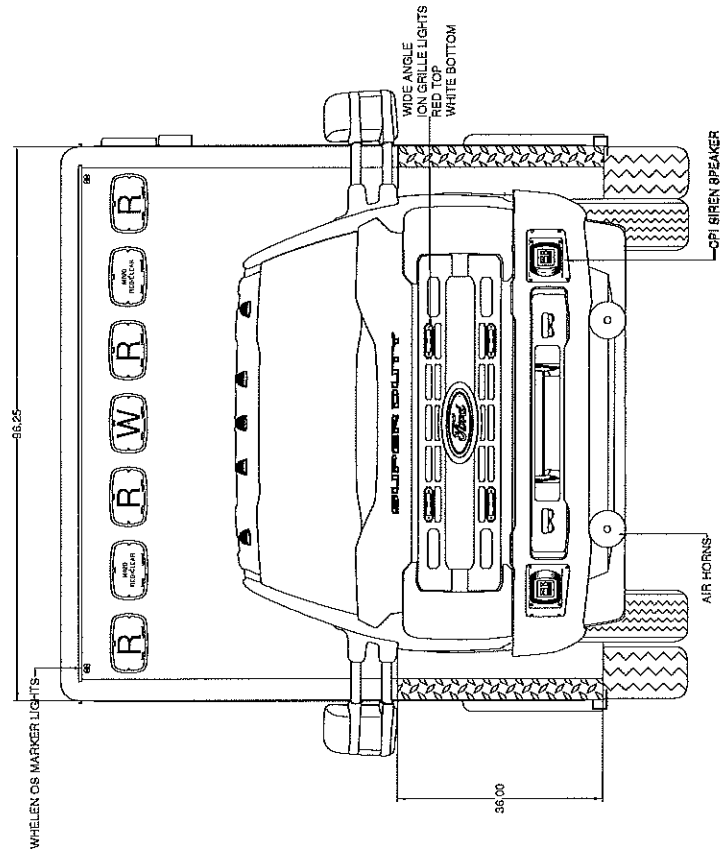


NOTE: DRAWINGS ARE FOR GRAPHICAL REPRESENTATION ONLY  
DIMENSIONS ARE APPROXIMATE & MAY VARY DURING CONSTRUCTION

PROPOSAL DRAWING


REV	DESCRIPTION	DA
	CONSOLE DRAWING	2/21

DRAWN BY: M.L.H.

FORD F-450 & F-550 STD CONSOLE i4G  
BLACK LINE-X COATED

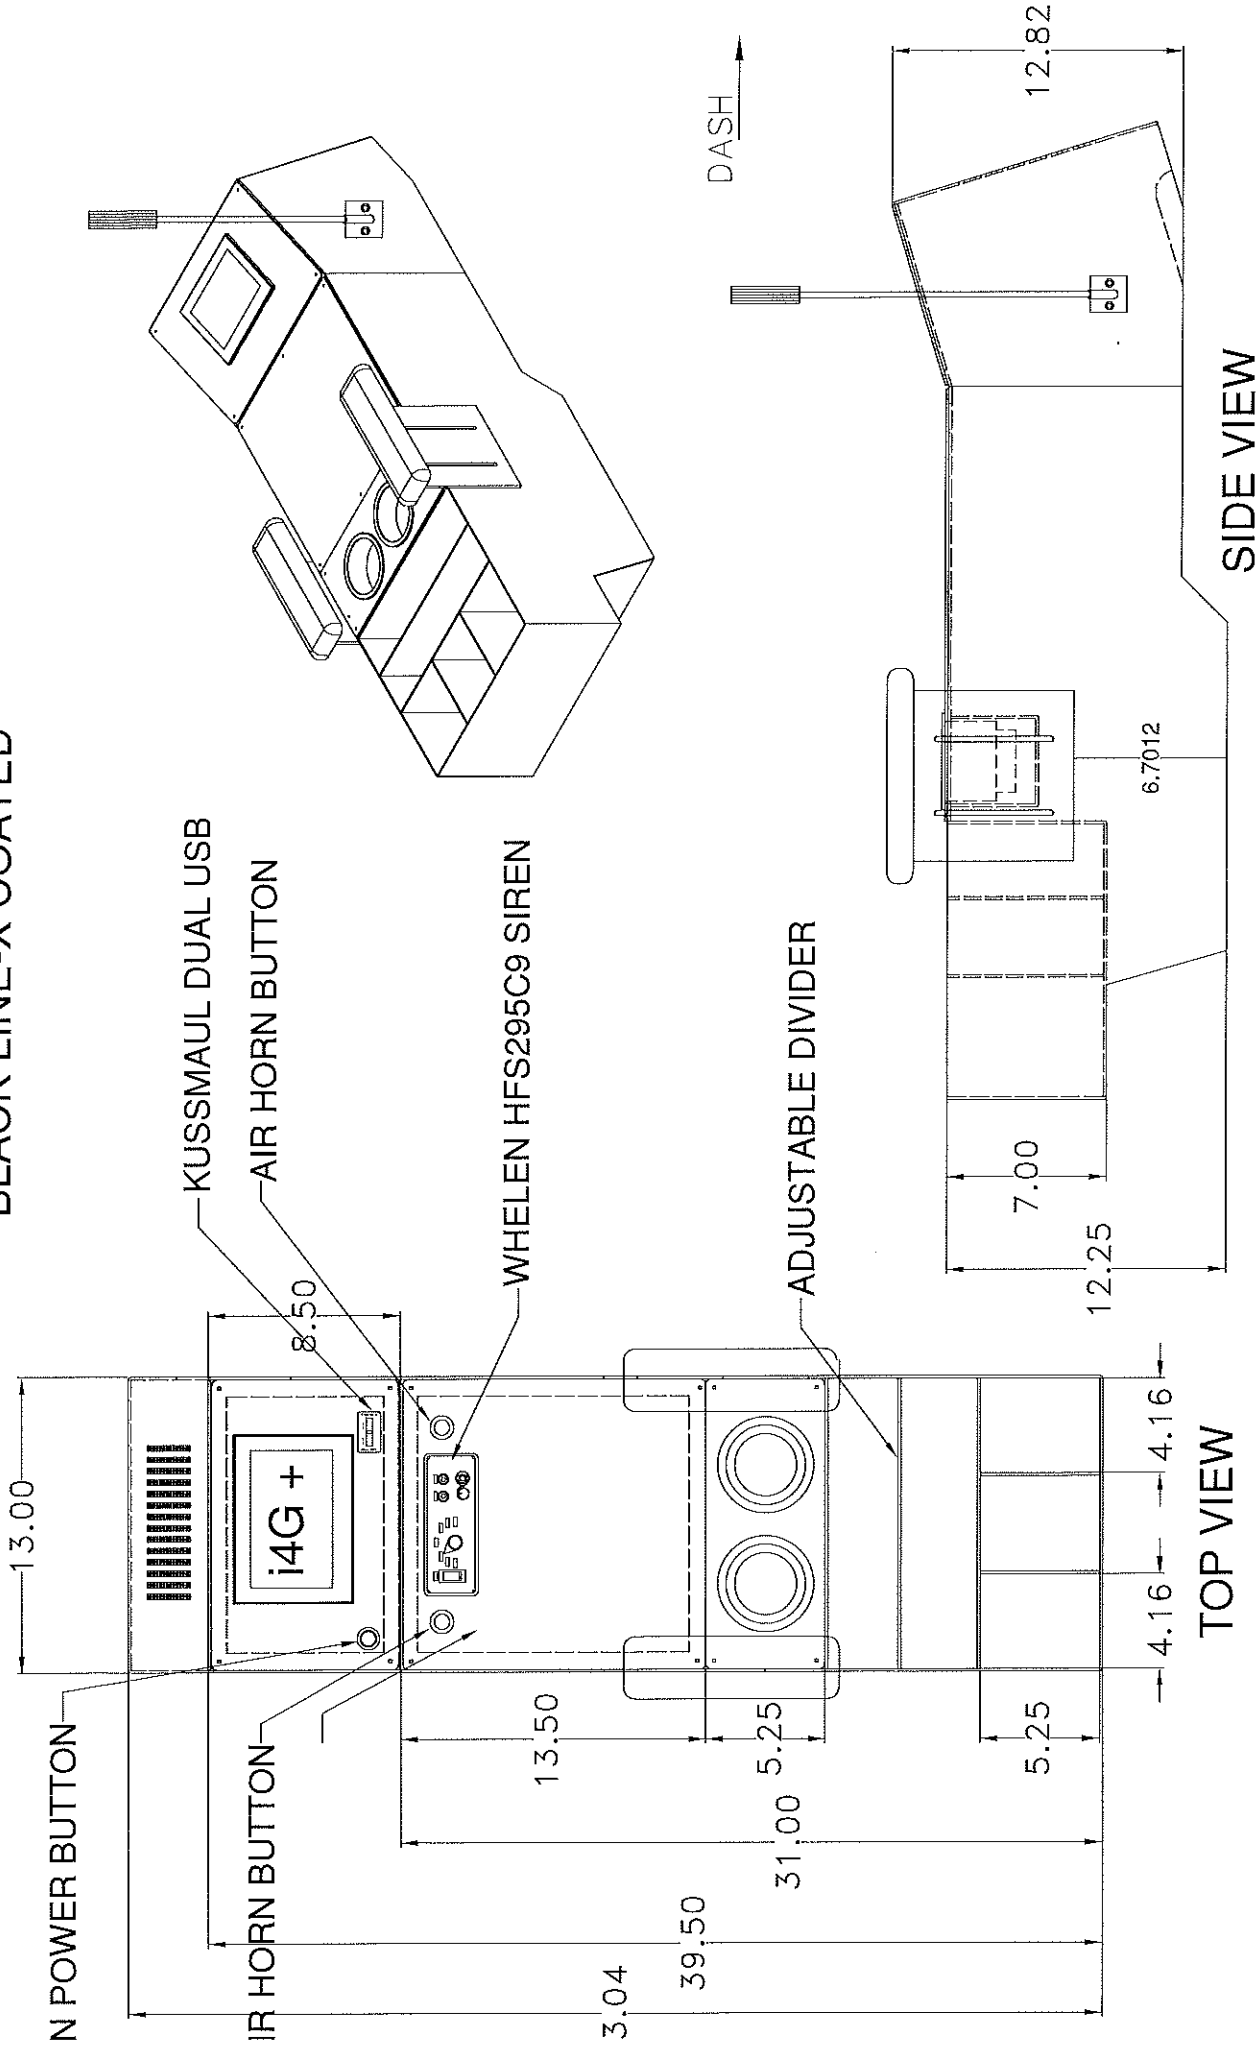

FORD CHASSIS

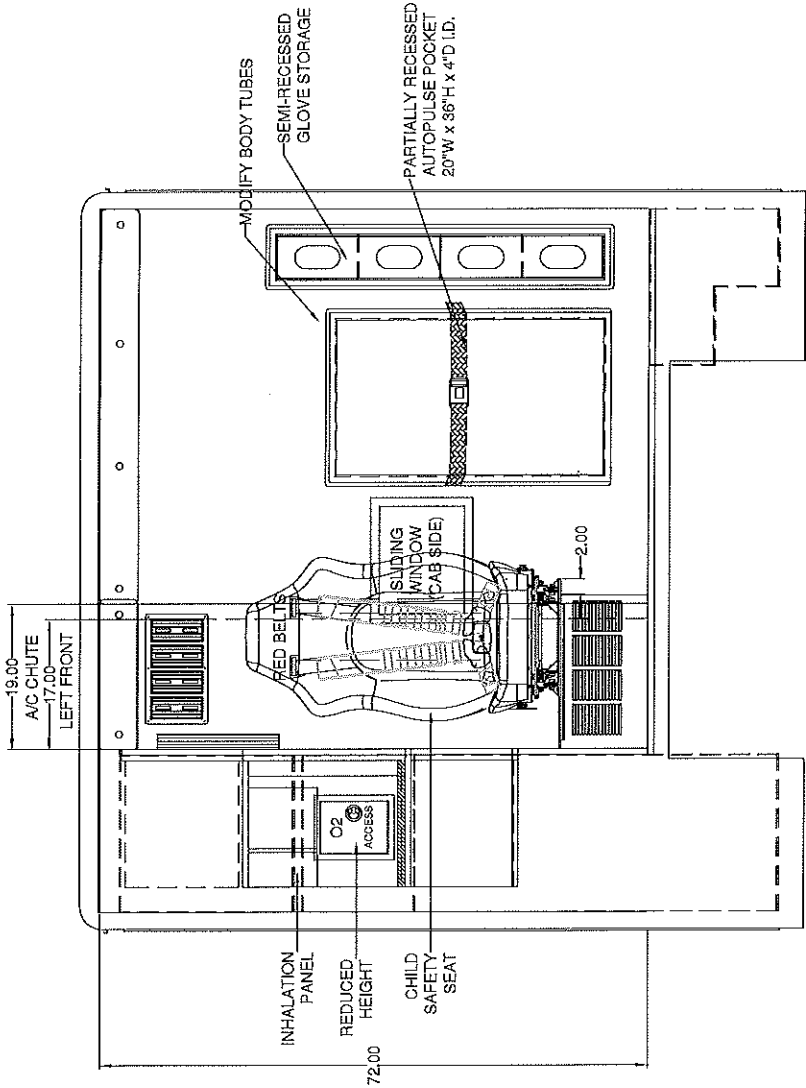

NOTE: DRAWINGS ARE FOR GRAPHICAL REPRESENTATION ONLY  
DIMENSIONS ARE APPROXIMATE & MAY VARY DURING CONSTRUCTION

PROPOSAL DRAWING










FORD CHASSIS

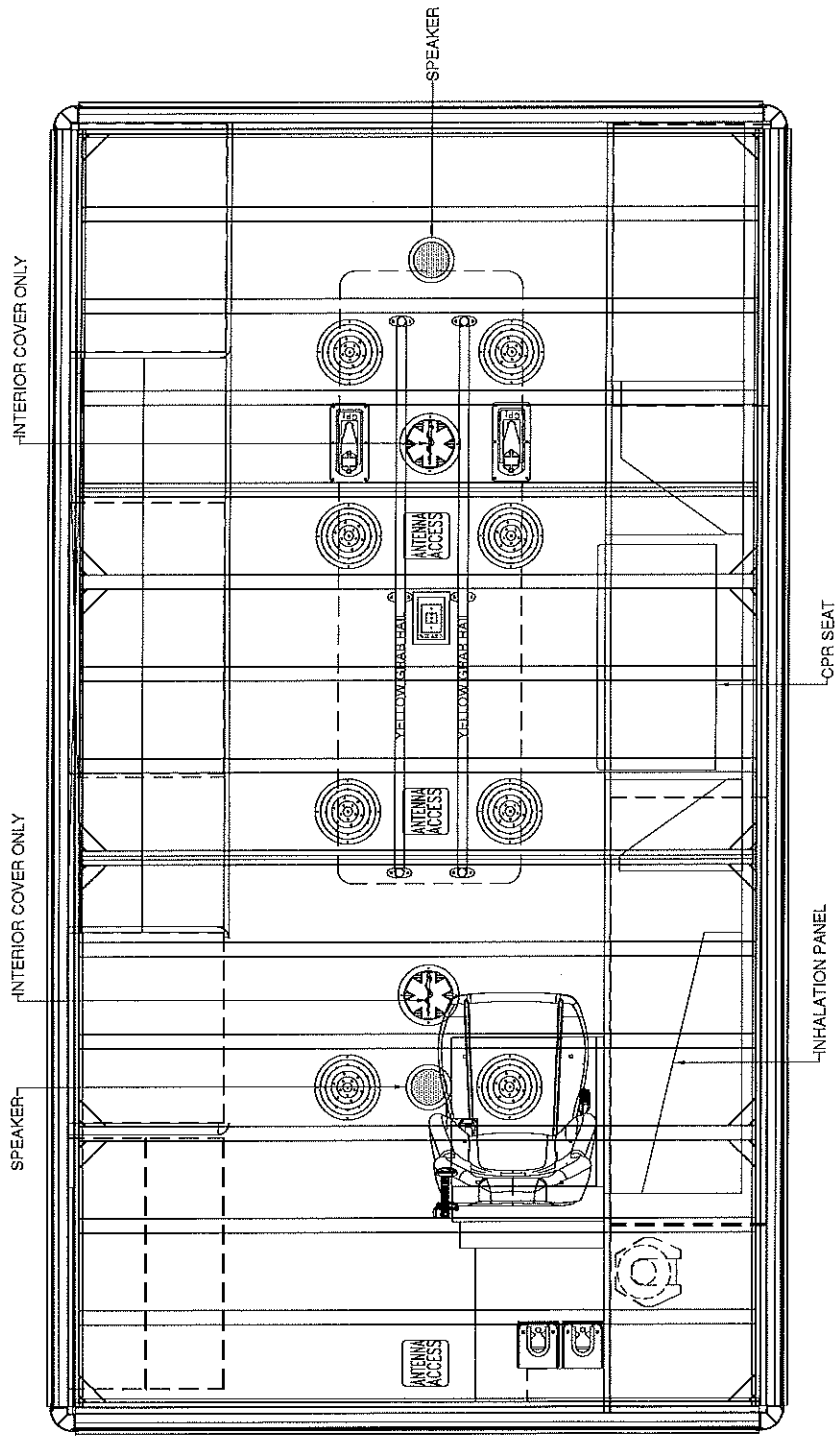

NOTE: DRAWINGS ARE FOR GRAPHICAL  
REPRESENTATION ONLY  
DIMENSIONS ARE APPROXIMATE & MAY VARY  
DURING CONSTRUCTION

PROPOSAL DRAWING



## PwrPro 2 and PowerLOAD

Quote Number: 11065896

Remit to: Stryker Sales, LLC  
21343 NETWORK PLACE  
CHICAGO IL 60673-1213  
USA

Version: 1

Prepared For: BERLIN EMS  
Attn:

Rep: JULIE SCHMITZ  
Email: julie.schmitz@stryker.com  
Phone Number: 5636767879  
Mobile: 5636767879

Quote Date: 02/11/2025

Expiration Date: 05/12/2025

### Delivery Address

Name: BERLIN EMS

Account #: 20019613

Address: 108 N CAPRON ST

BERLIN

Wisconsin 54923-1512

### Sold To - Shipping

Name: BERLIN EMS

Account #: 20019613

Address: 108 N CAPRON ST

BERLIN

Wisconsin 54923-1512

### Bill To Account

Name: BERLIN EMS

Account #: 20019613

Address: 108 N CAPRON ST

BERLIN

Wisconsin 54923-1512

### Equipment Products:

#	Product	Description	Qty	Sell Price	Total
1.0	639005550001	MTS POWER LOAD	1	\$31,290.16	\$31,290.16
2.0	650705550001	6507 POWER PRO 2, HIGH CONFIG	1	\$36,615.85	\$36,615.85
3.0	650700450301	ASSEMBLY, BATTERY CHARGER	1	\$800.00	\$800.00
4.0	650707000002	KIT, ALVARUM BATTERY, SERVICE	1	\$800.00	\$800.00
5.0	650700450102	ASSEMBLY, POWER CORD, NORTH AM	1	\$27.00	\$27.00
Equipment Total:					\$69,533.01

### Price Totals:

Estimated Sales Tax (0.000%):	\$0.00
Freight/Shipping:	\$913.91
Grand Total:	\$70,446.92

Prices: In effect for 30 days

Terms: Net 30 Days



## PwrPro 2 and PowerLOAD

Quote Number: 11065896

Remit to: Stryker Sales, LLC  
21343 NETWORK PLACE  
CHICAGO IL 60673-1213  
USA

Version: 1

Prepared For: BERLIN EMS

Attn:

Rep: JULIE SCHMITZ

Email: [julie.schmitz@stryker.com](mailto:julie.schmitz@stryker.com)

Phone Number: 5636767879

Mobile: 5636767879

Quote Date: 02/11/2025

Expiration Date: 05/12/2025

### Terms and Conditions:

Deal Consummation: This is a quote and not a commitment. This quote is subject to final credit, pricing, and documentation approval. Legal documentation must be signed before your equipment can be delivered. Documentation will be provided upon completion of our review process and your selection of a payment schedule. Confidentiality Notice: Recipient will not disclose to any third party the terms of this quote or any other information, including any pricing or discounts, offered to be provided by Stryker to Recipient in connection with this quote, without Stryker's prior written approval, except as may be requested by law or by lawful order of any applicable government agency. A copy of Stryker Medical's terms and conditions can be found at [https://techweb.stryker.com/Terms\\_Conditions/index.html](https://techweb.stryker.com/Terms_Conditions/index.html).





Helping Emergency Services Save Lives®

# Berlin Area EMS

Prepared by:

Kelly Silha  
American Response Vehicles  
ksilha@arvambulance.com  
**Submitted on:** 12/14/2024  
**Valid until:** 2/14/2025

Prepared for:

Evan VandenLangenberg  
108 N Capron St  
Berlin, Wisconsin 54923  
**Quote number:** 00001337





# Cover letter

Dear Evan,

Thank you for your interest in American Response Vehicles (ARV), the Nation's largest Ambulance-Only dealership. We represent AEV, the #1 selling Ambulance Brand in the industry for the last 15 years. AEV Ambulances are one of the safest and most durable ambulances in production today. From the drawing board to the testing facility, and finally, to the road, AEV is the most tested and most proven ambulance on the market today. With a multi-decade history of safety testing above and beyond the industry minimum, every facet of an AEV ambulance is designed for one purpose, to keep your providers safe.

Producing an average of 1,200 units every year that is between 2x-8x more than our competition, depending on the competitor. As a result of this success, they have innovated and refined their ambulance body far more than most other manufacturers. Their reliability, low cost of ownership, and proven safety are the reasons they are the most chosen brand across the nation for the most critical mission assignments, by the country's toughest fleets.

At its core, AEV's focus is on occupant safety. They are still the only manufacturer to have conducted double destructive impact dynamic testing. Unlike most manufacturers who stop at the minimum industry standards, AEV sets all their test requirements to a minimum 27% higher, and often will push for the highest possible test forces. For the roof and side static load testing, AEV exceeds other brands by over 40%!

Being the largest ambulance manufacturer in the US also means AEV builds one of the most dependable and sought-after vehicles in the market. Because of their dedication to detail and reliability, AEV has one of the lowest costs of ownership in the industry. AEV's are designed to stay in service longer, require less maintenance, and be easier to service than any other brand. Built in a State-Of-The-Art 400,000 sq. ft. you can trust that AEV will not only meet but exceed your expectations. All AEV Ambulances come with industry-leading warranties in all areas of the vehicle, a true testament to the reliability of the body!

Our dedicated team of highly trained and experienced Sales Representatives will work with your agency to design the best possible vehicle for your fleet. AEV has more options and more customization than any other manufacturer. As such, our sales team will carefully guide your committee, using our consulting approach, to provide the best designs for your consideration. With a combined 250+ years of experience, and a Nation-Wide customer base, ARV is the best partner with the most experience and versatile knowledge base in the industry!

We can connect you with customers from the Mid-Atlantic to the Mid-West (14 States of coverage) and share vital information on vehicle designs from other agencies. This is something no other dealership in your area can provide.

All AEV ambulances are built to exceed the requirements of the F.M.V.S.S. and KKK-A-1822-F and can be built in line with CAAS and NFPA standards as well. All AEV ambulances are built on ambulance prep chassis. AEV is a proud member of NTEA. All vehicles are built to meet and exceed all national standards and certification.

# Project Fees



Description	Price
2027 AEV Type III Custom Ambulance 172 x 96 x 74 Ford E450, LWB, 4x2, Gas	\$402,764.76
Less AEV, Ford, & ARV Discounts	\$7,400.00

## Total

**\$395,364.76**

Terms are net on delivery or active lease purchase.

\*No deferred maintenance allowed on trade-ins\*

### Proposal Includes

- Delivery will be 900 to 1080 days after approval of the work order confirmation.
- Ali Arc Stainless Steel Front bumper
- Stryker Power-load
- Stryker Power Pro 2



# Project Timeline

## Project Review

- 2 to 4 weeks
- Review Work Order
- Review Interior & Exterior Drawings
- Submit changes to the factory
- Work Order Confirmation
- Project Review
- Our engineering team reviews the interior and exterior drawings.
- Submits any necessary changes to the factory and processes the work order confirmation.

## Paint & Production


- 6 to 10 weeks
- Aluminum body arrival inspection
- Paint Application
- Body Mounting
- Mid-Point Inspection
- Production Line Completion
- Graphics Install
- QC Inspection

## Aluminum Body Construction

- 4 to 6 weeks
- AEV Engineering will review and confirm the modular body design with Mickey Truck Body.
- Mickey starts construction on the aluminum modular body.
- Construction of the aluminum modular body takes 4 weeks from start to finish.
- Upon inspection and approval of the aluminum body, Mickey will ship the aluminum body to AEV.

## Inspection & Delivery

- 1 to 3 weeks.
- With final inspection by AEV done, the body is delivered to ARV. We complete an additional check list inspection before delivering the body to the end user.
- Arrival Check List
- Delivery to End User

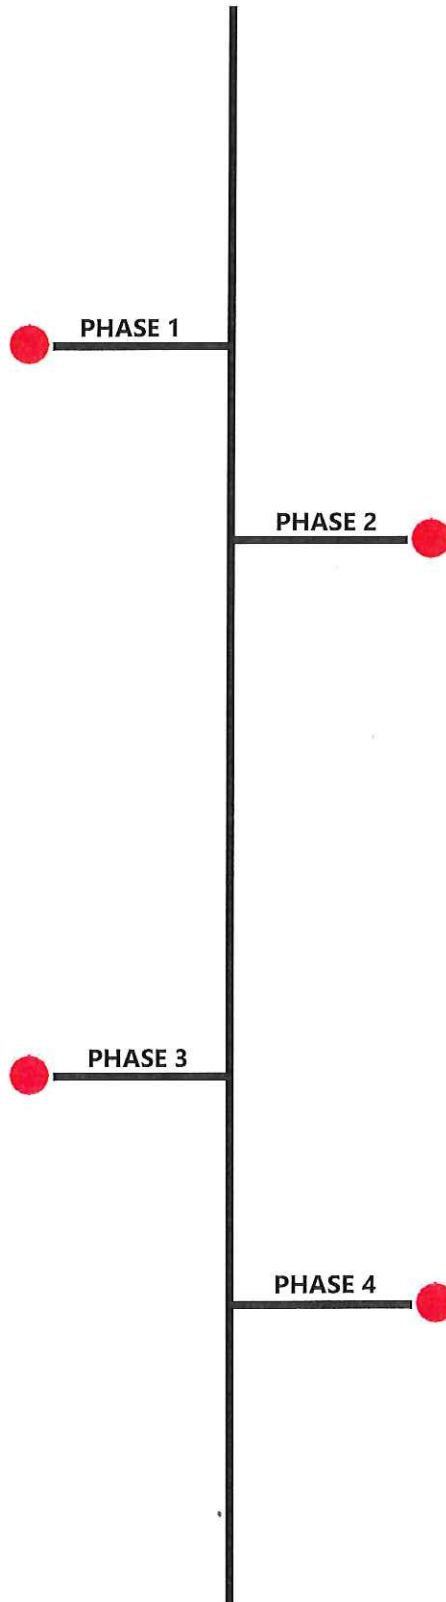



# Sign-off



Standard chassis manufacturer's warranties apply and will start on the date and mileage at delivery. The warranty on our all aluminum fully welded modular body is 20 years. Our conversion warranty including our electrical system, paint, and graphics is 7 years or 70,000 miles.

All parts and services are available through our facility in Columbia, Missouri. We offer twenty-four-hour delivery on parts in most cases. If a part is not in our inventory, it will be shipped to you direct from the manufacturer, again, in most cases within twenty-four hours.

Thank you for your consideration of ARV. We look forward to continuing to provide you with the very best ambulance available in the market today. If I may be of any assistance, please contact me at 1-888-448-8881.

Sincerely,

A handwritten signature in black ink, appearing to read 'KS', followed by a long horizontal line.

Kelly Silha



## Quote SO

Berlin Emergency Medical Service  
108 N Capron St  
Berlin, WI 54923

American Response Vehicles  
Kelly Silha  
521 Hillsdale Road  
Columbia, MO 65201  
573-443-8881

Exp. Date: 12/21/2024  
Quote No: 10037-0097  
12/05/2024

Page 1

PART NO	S	DESCRIPTION	QTY
== ***** <b>BID STANDARDS</b> ***** - 38.004 11/04/24 ==			
00-00-0010		-- ORDER NUMBER	1
00-00-0107		-- Order Date: Post November 1st, 2024	1
00-00-0113		-- Ambulance Built to Star Of Life KKK-A-1882-F Certification, Latest Revision	1
00-10-0015		Vehicle Quantity (Vehicles)	1
00-91-0003		CHASSIS VIN NUMBER:	1
<b>00-91-0021</b>		<b>ACCOUNT SPECIALIST: Randall Pennington</b>	<b>1</b>
00-91-0027		REFERENCE UNIT #:	1
00-91-0028		RE-WRITE DATE :	1
00-91-0040		SEAT BELT POSITIONS MODS	1
00-91-0042		-- CAB SEAT BELT MOD:	1
00-91-0044		-- Total: 2 Seated Positions in Chassis Cab	1
00-91-0050		-- REAR SEAT BELT MOD:	1
<b>00-91-0054</b>		<b> -- Total: 4 Seated Positions &amp; One Floor Mount Secured Patient</b>	<b>1</b>
00-99-9000		Revision Level: 0 - Zero - ORIGINAL VERSION	1
00-99-9030		Change Order Level: 0 - Zero - ORIGINAL VERSION	1
== *** <b>E-450 DRW Cut-away CHASSIS(154/164)**</b> - 38.004 11/04/24 ==			
01-3F-0000		Type III AEV Traumahawk Cut-A-Way, Modular Ambulance	1
<b>01-AU-3F44</b>	<b>S</b>	<b>&lt; 2025 Ford, E-450 Cut-away, 158" WB 100" CA, Hi Trim, Gas</b>	<b>1</b>
		<b>AEV STD Spec.</b>	
		<b>GVWR 14,500 lbs.</b>	
		<b>7.3L V8 Gasoline Engine 350 HP premium</b>	
		<b>Special Order Chassis</b>	
		<b>OEM Ford Race Red</b>	
01-FM-EWH1		-- Wheel Simulators: Phoenix, Polished Stainless steel, E-Series	1
01-FM-TI08		-- Tire, SPARE: All season, Random Make LT225/75 R16, LR E	1
01-FM-TI01		-- Location: Shipped Loose	1



PART NO	S	DESCRIPTION	QTY
01-TU-0100		-- Jack and Tire Tools: None	1
01-OE-47C0		-- Throttle Control System	1
01-TP-0060		-- Tire Pressure Monitoring Caps all 6 Wheels	1
06-EA-01FD		-- Tire Valve Extensions, S/S Braided, PR, Dual Rear Wheel	1
03-EA-43PR		-- Side Mirrors, OEM Black Telescope -E Series	1
		<b>== 164-172 x 95 E450 Module Body, Conversion - 38.004 11/04/24 ==</b>	
00-99-0180		Chassis Axle Digital Alignment	1
01-Y0-0002		BODY Generation 10	1
01-X0-0002	<	-- Body Certification Provided to Specification -Gen 10 The Body Manufacturing group certifies that this Ambulance Modular body has been constructed of materials and methods that meet or exceed the standards as required by the AEV Generation 10 Body Specification of February 24, 2022 as published. The body shall be built and constructed to the submitted work order and the AEV Generation 10 build standards without exception. Any Deviations to the work order or Generation 10 build standards must have written authorization prior to body delivery to AEV by the AEV Body Engineer on file.	1
02-00-0002	<	-- Body Build Information Body Number; Account Manager; Chassis Type : Mickey Body Due Date;	1
02-00-0003	<	-- ALL DIMENSIONS ON ORDER WILL HAVE A VARIABLE OF + OR - 1/4" Unless specified as a minimum dimension.	1
02-B2-3F72	S	Body, Module: Cut-away, 172 x 96 x 74" Interior Head Room	1
02-00-0006	S	-- Headroom: 74" Finished Interior - Ducted A/C	1
02-00-0060		-- Compartment and Entry door Full length Stainless Steel Hinges std	1
02-B0-3F2E		-- Cab Extension: 10-inch - allows full OEM seat travel + 4"	1
02-B0-CC01	<	-- Compartment Construction: STANDARD, Unless Specified Otherwise Sides and Back: .100 Polished Aluminum Diamond Plate Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-SFL0	<	-- Compt Floors: Sweep-out, even with bottom door jamb Unless Specified Otherwise.	1
02-B0-CC41		-- Compartment floor thickness .125" standard	1
02-B0-CC18		-- Compartment Ventilation - Flap style #VT-2495-A01, STD	1
02-B0-CE03		-- Curb side Entry Door (CSE): 73.8 High x 31 Wide - 164+	1
02-B0-09B2		-- C/S Door Check : Double Action Gas Shock	1
04-EA-09B1		-- Door Swing Angle: Set to 90-100 degrees	1
02-B0-CESL		-- Curbside Entry Door (CSE) Location: Standard, Rearward of M-7 Compt if Optioned	1
02-B1-SW21	XS <	-- Step Well:T3,curbside Entry Door,2-Step Dim. Plate 3 inch drop to have (2) step stepwell ILOS	1
05-IL-09SZ	<	-- ILOS Lts, Step Well: 3" Kin#4302S LED stainless steel surface mount housing Light shall come on with CS door or with right flood switch.	1
02-B1-M1AA	S	-- M-1 Compt (LF): 74 HR, 63.5" H x 22" W x 20" D w/M1a	1
02-B0-CCM1	<	-- M-1 Compartment Construction: Smooth Aluminum ILOS Sides and Back: .090 Aluminum Sheet Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-CC09		-- Compartment Door Panel: Smooth Aluminum	1
02-B0-CFM1		-- Compartment Surface Finish: Speed Liner, Black - M-1	1



PART NO	S	DESCRIPTION	QTY
02-B0-CFNO		-- Component Finish (Shelf/Tray/Divider): Standard	1
02-B0-CC16		-- Compartment Door Ventilation - small punched half-moon Louvered Door	1
02-B0-CC23	<	-- Aluminum Rain Diverter -Double Louver Column Installed in Compt Door AEV to build and install	1
02-B0-SWFL		-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		-- Compartment floor thickness .125" standard	1
02-BC-10A5		-- Compartment Door: SINGLE DOOR, Forward hinged 2-point Latch	1
02-B0-09B0		-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		-- Door Swing Angle: Set to 90-100 degrees	1
04-TS-0037		-- Storage in Oxygen compartment Requested Exception to KKK-F Specifications	1
04-TS-11B0	S <	-- Shelf, Adjustable, Ext: .125 smooth Aluminum, 2" Upward Lips Located Over O2 Storage	1
04-TS-4010		-- Shelf Bracket: 90 Deg with Slotted Holes	1
11-YZ-0903		-- Non-Compliant to 3.11.3 KKK-F Storage in Oxygen Compartments Notice	1
05-EL-4980	S <	-- Light, Compt: TecNiq E44 Strip Light, E44-W440-1 - ILOS MTB Note: No light hole required Location: Light Strip to be installed on all sides (Except Bottom) Strip length 198" maximum, Strip to be cut to length by manufacturing and connectors installed.  Include Tracking/Brackets IATS Adhesive Tape	1
08-B1-02LI		-- Prep for O2 Lift: NONE	1
12-ZZ-ZZZZ		--	1
02-B1-M1BA	S	-- M-1a Compt (LF Upper): 74 HR, 17.56" H x 22" W x 20" D	1
02-B0-CCM0	<	-- M-1a Compartment Construction: Smooth Aluminum ILOS Sides and Back: .090 Aluminum Sheet Compartment Ceiling: .090 Aluminum Sheet	1
02-B0-CC09		-- Compartment Door Panel: Smooth Aluminum	1
02-B0-CFM0		-- Compartment Surface Finish: Speed Liner, Black - M-1a	1
02-B0-CFNO		-- Component Finish (Shelf/Tray/Divider): Standard	1
02-B0-CC1B		-- Compartment Ventilation - M-1A Pancake Fan & 1-Column of Louvers	1
02-B0-CC22	<	-- Aluminum Rain Diverter -Single Louver Column Installed in Compt Door AEV to build and install	1
02-B0-SWFL		-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		-- Compartment floor thickness .125" standard	1
02-BC-10A0		-- Compartment Door: SINGLE DOOR, 1-point Latch	1
02-B0-09B0		-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		-- Door Swing Angle: Set to 90-100 degrees	1
05-EL-4949	<	-- Light, Compartment: Kinequip #108818C 8", Strip Light, M-1A, ILOS MTB Note: No light hole required	1
12-ZZ-ZZZZ		--	1
02-B1-M264	S	-- M-2 Compt (LFM): 34.5" H x 42" W x 20" D	1
02-B0-CCM2		-- M-2 Compartment Construction: Smooth Aluminum ILOS	1
02-B0-CC09		-- Compartment Door Panel: Smooth Aluminum	1
02-B0-CFM2		-- Compartment Surface Finish: Speed Liner, Black - M-2	1
02-B0-CFNO		-- Component Finish (Shelf/Tray/Divider): Standard	1
02-B0-SWFL		-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		-- Compartment floor thickness .125" standard	1
02-B1-BIO2		-- Bio-Waste: DELETE M-2 Location	1



PART NO	S	DESCRIPTION	QTY
04-TS-11B2	<	/-- Shelf, Fixed, Delete Delete standard bio-waste	1
02-BC-10D0		/-- Doors, Compartment, DOUBLE DOORS (std)	1
02-B0-09B0		/-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		/-- Door Swing Angle: Set to 90-100 degrees	1
04-TS-11D3		/-- M-2 Shelf, Adjustable, Ext: .125 Smooth Alum, 2" Upward lip	1
04-TS-4010		/-- Shelf Bracket: 90 Deg with Slotted Holes	1
05-EL-4980	S <	/-- Light, Cmpt: TecNiq E44 Strip Light, E44-W440-1 - ILOS MTB Note: No light hole required Location: Light Strip to be installed on all sides (Except Bottom) Strip length 198" maximum, Strip to be cut to length by manufacturing and connectors installed.  Include Tracking/Brackets IATS Adhesive Tape	1
05-HA-13KZ		/-- Condenser, 12V:#25062 Dual Fan, Front of Module -E Super tie in	1
04-HA-1310	<	/-- ARCTIC WEDGE Front of Body No Pre-drilled holes part #WEDGE-HVAC >>> No Pre-drilled light holes. Use of the wedge is subject to engineering review and approval for Light duty Type III models. A reduction in light sizing above the wedge may be required.	1
04-HA-1362		/-- Warning Lights installed on Condenser cover	1
12-B0-0004		/-- Painted Part- Painted Special color to match Body	1
06-RR-13Z0		/-- Standard Conduit: 1-1/2", with pull wire	1
06-RR-13O7		/-- CONDUIT ORIGIN POINT: M-1A Compartment	1
06-RR-13T3		/-- CONDUIT TERMINATION POINT: Behind A/A Board (Panel)	1
09-ZZ-ZZZZ		/--	1
09-ZZ-ZZZZ		/--	1
02-B7-M368	S <	/-- M-3 Compt (LR): 60.5" H x 33.1" W x 20" D WILL NARROW TELEMETRY AREA, LP WILL PROBABLY NOT FIT	1
02-B0-CCM3		/-- M-3 Compartment Construction: Smooth Aluminum ILOS	1
02-B0-CC09		/-- Compartment Door Panel: Smooth Aluminum	1
02-B0-CFM3		/-- Compartment Surface Finish: Speed Liner, Black - M-3	1
02-B0-CFN0		/-- Component Finish (Shelf/Tray/Divider): Standard	3
02-B0-SWFL		/-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		/-- Compartment floor thickness .125" standard	1
02-BC-10A5		/-- Compartment Door: SINGLE DOOR, Forward hinged 2-point Latch	1
02-B0-09B0		/-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		/-- Door Swing Angle: Set to 90-100 degrees	1
04-TS-11B5	S	/-- (3) Shelves, Adjustable, Ext: .125 Smooth Aluminum, 2" Upward Lips IATS	1
04-TS-4010		/-- Shelf Bracket: 90 Deg with Slotted Holes	2
05-EL-4980	S <	/-- Light, Cmpt: TecNiq E44 Strip Light, E44-W440-1 - ILOS MTB Note: No light hole required Location: Light Strip to be installed on all sides (Except Bottom) Strip length 198" maximum, Strip to be cut to length by manufacturing and connectors installed.  Include Tracking/Brackets IATS Adhesive Tape	1
09-ZZ-ZZZZ		/--	1
02-B4-M572	S	/-- M-5 Compt (RR): 74 HR, 81.8" H x 21.6" W x 21.5" D	1
02-B0-CCM5		/-- M-5 Compartment Construction: Smooth Aluminum ILOS	1

PART NO	S	DESCRIPTION	QTY
02-B0-CC09		-- Compartment Door Panel: Smooth Aluminum	1
02-B0-CFM5		-- Compartment Surface Finish: Speed Liner, Black - M-5	1
02-B0-CFN0		-- Component Finish (Shelf/Tray/Divider): Standard	1
02-B0-CC13	<	-- Compt Venting - Compartment Ceiling O O O and Square Holes Horiz ARV STYLE	1
<p>MTB NOTE: hat channel with three (4") holes above the hat at the ceiling level.            &gt;&gt; Additional Horizontal square holes in out facing vertical hat channel.</p>			
02-B0-SWFL		-- Compt Floor: Sweep-out, even with bottom door jamb.	1
02-B0-CC41		-- Compartment floor thickness .125" standard	1
02-BC-10A5		-- Compartment Door: SINGLE DOOR, Forward hinged 2-point Latch	1
02-B0-09B0		-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		-- Door Swing Angle: Set to 90-100 degrees	1
04-TS-1400		-- Divider, Vertical, Full compartment height, smooth aluminum Fixed	1
04-TS-12ZS	S <	-- Slide Out Stair Chair Bracket: Made of Smooth Alum and Located on Wall 3 Square trough at bottom, trim upper edge with Stampro rubber trim Install seatbelt restraint 20 inches up from inside bottom of trough.  Add Cut Out Handle for ease of pull out	1
04-TS-12ZY	S	-- (3) Adjustable Shelves: Located Forward of Divider and Above Stair Chair Bracket	1
04-TS-STT3	S <	-- Strap: 2" Webb Cargo Belt 30-Inch long, adjustable ILOS For Stair Chair Bracket	1
04-TS-STR2		-- 2" Footman Loops: Locate back from jamb	1
04-TS-STR1	S <	-- Strap: 2" Webb Seatbelt buckle chrome footman loops -Custom Length ILOS Wall 1 to Divider	1
04-TS-STR2		-- 2" Footman Loops: Locate back from jamb	1
05-EL-4981	S <	-- Light, Cmp: TecNiq E44 Strip Light, E44-W440-1 - ILOS MTB Note: No light hole required Location: Light Strip to be installed on all sides (Except Bottom) Strip length 198" maximum, Strip to be cut to length by manufacturing and connectors installed.  Include Tracking/Brackets IATS Adhesive Tape	1
09-ZZ-ZZZZ		--	1
02-B1-M600		-- Delete M-6 Compartment	1
09-ZZ-ZZZZ		--	1
02-B1-M763	S	-- M-7 Compt (RF): 74 HR, 48.6" H x 25.25" W, I/O to ALS	1
02-BC-10A0		-- Compartment Door: SINGLE DOOR, 1-point Latch	1
02-B0-09B0		-- Compt Door Check: Double Action Gas Shock	1
04-EA-09B1		-- Door Swing Angle: Set to 90-100 degrees	1
05-EL-40M7		-- Light, Compt, M-7 (RF): NONE	1
12-ZZ-ZZZZ		--	1
02-B1-M864		-- M-8 Drawer (RF): Batt, 164, 12.1" H x 25.25" W x 21" D	1
02-B0-CC00	<	-- Battery Drawer compartment Construction: STANDARD Diamond Plate Sides and Back: .100 Polished Aluminum Diamond Plate Compartment Bottom: .125 Aluminum Sheet Compartment Ceiling: .090 Aluminum Sheet	1



PART NO	S	DESCRIPTION	QTY
02-BC-10E0		-- Drawer Front: 2-point latch	1
05-ZZ-ZZZZ		--	1
02-B1-RA02		-- Rear Access Doors: 46 3/4" Wide x 60 5/8" High	1
02-BD-0124		Body Drop: 3" Both Sides, Ahead of Rear Wheels	1
		WELDING - CELL 1	
04-AS-1800		-- Stainless Steel - Sill protection: For the following compartments	1
04-AS-18NC		-- M-1: Left Front Compartment - Multiple Bend	1
04-AS-18NE		-- M-2: Left Front Middle Compartment - Multiple Bend	1
04-AS-18NG		-- M-3: Left Rear Compartment - Multiple Bend	1
04-AS-18NK		-- M-5: Right Rear Compartment - Multiple Bend	1
04-AS-18NO		-- M-7: Right Front Compartment - Multiple Bend	1
04-AS-06A1		Fuel Fill: CPI Housing with Drain 53 FGT0053-1-238	1
04-AS-0204	<	-- Fuel over Fill protection plate: Stainless Steel 12" Wide Stainless steel shield shall be contoured to fit under the fuel filler housing.	1
04-BW-AB95		-- Bumper, Rear: HD Alum Framed w/DP pontoon covers	1
04-BW-FLIM	<	-- Step, Center: 2" x 7" Grip strut, flip-up PURCHASED WITH BODY	1
04-EA-1300		-- Dock Bumpers: Rubber 2 1/4" H x 16" W x 2" Thick	1
04-BW-AF19		-- Fenders, Rear: Polished Aluminum	1
04-BW-DP01		-- Skirt Rails: Polished Aluminum Diamond Plate, Box style std	1
04-BW-DP92	<	-- Corner Caps: 24.0" High, Alum Diamond Plate If there is a body drop, add the appropriate height to Corner Caps.	1
04-BW-DP93	<	-- Front Stone Guards: 24.0" High, Alum Diamond Plate If there is a body drop, add the appropriate height to Stone Guards.	1
04-BW-DP14		-- Rear Kick Plate: Polished Aluminum Diamond Plate	1
04-BW-TA03		-- Recessed Tag Area: Polished Aluminum Diamond Plate	1
04-BW-TA04		-- Location: Centered in the kick plate	1
05-EL-44TN		-- Tag Light: Kinequip LED #132703C	1
04-EA-1400		-- Running Boards: Diamond Plate, Cutaway Modular, E-Series	1
04-EA-1120		-- Mud Flaps Front: NONE	1
04-EA-1132		-- Mud Flaps Rear: Modular, Rubber AEV LOGO	1
05-EL-3904	<	-- Lights, Cab Step: 2" White LED, chrome flange mounted in box front, Whelen Activate by Cab Doors. Constant Hot.	1
04-EA-09A0		(2) Rear Door Hold Opens: Grabber Style, 1 on each door	1
		EXTERIOR LIGHTING / HEAT/AC / INSULATION - CELL 2	
05-EL-1800		CORNER CAP LED ICC/WARNING LIGHTS	1
05-EL-18F0		-- Front Corner Cap LED ICC/Warning Lights: Warnings RED/WHITE	1
05-EL-18F1		-- Front Center ICC Lts: (3) AMBER Kinequip LED No 112401A,	1
05-EL-18R5		-- Rear Corner Cap LED ICC/Warning Lights: Warnings RED/AMBER	1
05-EL-18R1		-- Rear Center ICC Lts: (3) RED Kinequip LED No 112401R	1
06-SW-CC01		-- ICC Warning Lights Switched: Primary Only	1
05-EL-2310		Tail Lights, Whelen LED Combinations , ILOS,	1
05-EL-35A6	<	-- Side Marker Lts: (2) Whelen M6 LED Red Running/Turn, ILOS Running to be wired as Tail and Turn to be wired as Stop. These are to both have flanges.	1
05-PH-LF20		-- M6 Series Flange, Chrome Plated, Std: Each	2
05-EL-2414		-- Whelen M6 Series, Tail Lights	1
05-EL-2420		-- Stop/Tail, Whelen M6 Series, LED, Pair RED LED/ RED LENS	1
05-EL-2426		-- Turn, Whelen M6 Series, LED, Pair Amber LED, Amber LENS	1



PART NO	S	DESCRIPTION	QTY
05-EL-2432		-- Back up, Whelen M6 Series, LED, Pair	1
05-PH-LF24		-- M6 Series Flange, Chrome Plated, Std: Three Pair	1
06-EC-4326		-- Note: Standard Back-up Alarm Installed	1
06-EC-4331		-- Access Panel: NONE Required	1
05-EL-2502		LED Lights, Patient on Board, Exterior	1
05-EL-252B	<	-- Red/White LED POB Light, Each	11
		M-1A Compartment - On Door panel, Outer lower corner	
		M-1 Compartment - On Door panel, Outer Edge, Centered Top to Bottom	
		M-2 Compartment - On Forward Door panel, Upper outer corner	
		M-2 Compartment - On Trailing Door exterior, Upper outer corner	
		M-3 Compartment - On Door panel, Outer Edge, Centered Top to Bottom	
		M-5 Compartment - On Door panel, Outer Edge, Centered Top to Bottom	
		M-7 Compartment - On Door panel, Outer Edge, Centered Top to Bottom	
		C/S Entry Door - Below Center panel, Outer Edge	
		Rear Entry Doors - (1) each door, Below Center panel, Outer Edge	
		A Total of (10) Lights	
05-EL-2564		-- Lights Switched with Entry Door Switch	1
05-EL-2568	<	-- Over ride switch, spring loaded, in Action Area	1
		Entry Doors Only	
05-EL-4315		Third Brake light, With Back-up Camera combo, see option 06-EC-3013	1
05-ZZ-ZZZZ		--	1
05-EL-4584		SCENE/FLOOD LIGHTS (LED-M9 Series)	1
05-EL-45L4		-- Left Scene Lights: (2) LED-M9ZC Chrome Flange Whelen	1
05-EL-0224		-- Flanges: Above M9 Scene lights, Incorporated into lights	1
06-EL-18LF		-- Left Flood Activate: Left Flood Switch	1
05-EL-45T4	<	-- Right Scene Lights: (2) LED-M9ZC, Chrome flange Whelen	1
		Chrome Flange provided with purchase of Light.	
05-EL-0224		-- Flanges: Above M9 Scene lights, Incorporated into lights	1
06-EL-18RT		-- Right Flood Activate: Right Flood Switch and open CSE Door	1
05-EL-46R4	<	-- Rear Load Lights: (2) LED-M9ZC, Chrome flange Whelen	1
		Chrome Flange provided with purchase of Light.	
05-EL-0224		-- Flanges: Above M9 Scene lights, Incorporated into lights	1
06-EL-18RE		-- Activate: Rear Flood Switch, Reverse and Lead RA Door	1
06-EL-1800		-- Add Activation: Rearward Left and Right scene lights. come on w/ Reverse	1
		HEAT AND A/C	
05-HA-2005		-- Patient Ventilation System: 4 inch Power Intake, 4 inch Power Exhaust STD	1
05-HA-140A	S <	HVAC AEV Ducted in Ceiling (AC Heat Unit) - Vert. E450 std	1
		Mounted Behind the Attendant Seat Base	
		Facing Rear ILOS	
05-HA-0400	<	-- Water Pump: Additional - Required	1
		This pump shall be installed in-line and shall come on with the heat switch position.	
05-HA-1403		-- AC Hoses: Pre-charged, GoodYear Galaxy	1
05-HA-1404		-- Heater Hoses: EPDM - Nomex Rubber (per Ford QVM)	1
05-HA-14A0		-- Side Plenum Grille, Return Air: Stamped Powder Coated Steel	1
05-HA-14B1		-- Filter, Washable Carbon Pre-Filter	1
05-HA-14C0		-- AC COMPRESSOR: Tee into OEM	1
05-HA-15A0		-- Ducted AC Delivery: insulated & foil wrapped, 10 registers	1
10-HA-0301	S	-- Thermostat, Rear A/C, Digital, Class 1, LX-1, front Included Also	1
05-HZ-ZZZZ			1



PART NO	S	DESCRIPTION	QTY
CEILING PANELS: ACM Gloss White			
05-IL-0261		-- Dome Lts, LED K-EDGE (4) , (4) std	1
05-IL-047C		-- Trauma LT (3) K- EDGE Dome White- Center Pad	1
06-EC-2500	<	-- Timer: Electronic, 15 Min with momentary switch Located on curbside wall at head of squad bench.	1
06-EC-09P3		-- Timer to Power: All Center pad Lights	1
09-MH-0761		-- IV Hook No 1: Austin Hardware IV 3113 Dual (Recessed Mount), ILOS	1
09-MH-08P0		-- LOCATION: OH chest area, primary patient on COT	1
09-MH-0762		-- IV Hook No 2: Austin Hardware IV 3113 Dual (Recessed Mount), ILOS	1
09-MH-08P2		-- LOCATION: OH /chest area, secondary patient on S/B	1
09-MH-2AC6		-- Recessed C/S Grab Rail, ceiling: 1.25 Dia..... 3 pt, 72 in, Yellow Antimicrobia	1
09-MH-2ASS		-- Streetside Grab Rail: None	1
05-IN-0STX		Insulation PKG: X-Series Package, ILOS	1
05-IN-1STD		-- Insulation: Circumferential PKG, Single Layer Reflective w/ Air cell core	1
05-IN-3SDX		-- Insulation: All Module Entry Doors, 2" Black Foam, ILOS	1
05-IN-4ST9		-- Insulation Sound Deadening: Generation 10 Floor	1
05-IN-5STY		-- Insulation: Walls/Ceiling, 1" Black Foam, IATS Reflective	1
05-IN-6SDX	<	-- Insulation: Black Sound Proofing, Patient side of Compartment walls IATS INSU-KSU Install on available vertical compartment walls facing the patient area	1
05-IN-6STF	<	-- Stepwell Insulation: Urethane Froth Insulation, IATS MTB option #7208738	1
LIGHTBAR(S) / LIGHTBAR ALTERNATIVE LIGHTS			
05-LB-6100	S <	-- Light Bar Alternative, (4) Across Front, 92" or wider R/R/W/R/W/R/R	1
05-LB-6240		-- Front of Module M Series LED System - 92" and wider	1
05-PM-LT03		-- Light: Whelen M9, LED, WHITE LED/CLEAR Lens, Programmable iats	2
05-PH-LF10		-- M9 Series Flange, Chrome Plated, Std. Each	2
05-PM-LT07		-- Light: Whelen M9, LED, RED LED/RED Lens, Programmable IATS	2
05-PH-LF10		-- M9 Series Flange, Chrome Plated, Std. Each	2
05-LB-6900		-- Alternative Lightbar Switching, Prim/Sec	1
05-SY-LTME		WHELEN M- SERIES LED WARNING LT SYSTEM - E-series LTD	1
05-FS-0712	<	-- Flasher: None, All M Series LED's Are Programmable Default #1 signal alert unless otherwise specified >> Customer to verify chosen flash pattern.	1
05-FS-10P4		-- Flash Pattern: None, Internal Light Head Flasher	1
06-SW-PS01		-- Warning Light SWITCH: center console, Primary / Secondary	1
05-PL-LT02	S <	-- (4) Grille Lights: Whelen M-2, Wide Angle ILOS There Will be (4) M2 Grille Lights ILOS  There will be (2) Red w/ Red Lens Above (2) White w/ Clear Lens ILOS  Lights to Flash in "X" Pattern	1
05-PG-2005		-- Grill or Int. M2 Chrome Flange Each	2
05-PG-2050		-- Grille or Int M2 Wide Angle Red LED, Clear Lens-Prog. Each	2
05-PM-LE50		-- (2) Intersection Lights: Whelen M7 Series, LED	1
05-PG-2025		-- Grill or Int. M7 Chrome Flange Each	2
05-PG-2105	<	-- Grille or Int M7 Red LED, Clear Lens-Prog. Each Customer Requests Red Lens	2



PART NO	S	DESCRIPTION	QTY
05-PM-LF70		-- (1) Center Front Body Light: Whelen M9 Series, LED	1
05-PH-LF10		-- M9 Series Flange, Chrome Plated, Std. Each	1
05-PM-LRK5		-- Light: Whelen M9, LED, RED LED/RED Lens, Programmable ILOS	1
05-PM-LG70		-- (2) Outer Front Body Lights: Whelen M9 Series, LED	1
05-PH-LF12		-- M9 Series Flange Chrome Plated, Std: Pair	1
05-PM-LRK5		-- Light: Whelen M9, LED, RED LED/RED Lens, Programmable ILOS	2
05-PM-LH70		-- (4) Upper Side Body Lights: Whelen M9 Series, LED	1
05-PH-LF14		-- M9 Series Flange, Chrome Plated, Std: Two Pair	1
05-PM-LRK5		-- Light: Whelen M9, LED, RED LED/RED Lens, Programmable ILOS	4
05-PM-LI50		-- (2) Rear Intersection Lights: Whelen M7 Series, LED	1
05-PH-LF22		-- M7 Series Flange, Chrome Plated, Std: Each	2
05-PM-LRA9	S <	-- Light, Whelen LED M7 Amber LED/Amber Lens - Programmable ILOS to Work w/ Turn Signals IATS	2
05-PH-LF22		-- M7 Series Flange, Chrome Plated, Std: Each	2
05-PM-LJ70		-- (2) Outer Rear Body Lights: Whelen M9 Series, LED	1
05-PH-LF12		-- M9 Series Flange Chrome Plated, Std: Pair	1
05-PM-LRK5		-- Light: Whelen M9, LED, RED LED/RED Lens, Programmable ILOS	2
05-PM-LK70		-- (2) Additional Rear Body Lights: Whelen M9 Series, LED	1
05-PH-LT6B		-- Location: REAR, (1) aligned w/ EACH upper window in RA doors.	1
05-PM-LT07		-- Light: Whelen M9, LED, RED LED/RED Lens, Programmable IATS	2
05-PH-LF10		-- M9 Series Flange, Chrome Plated, Std. Each	2
06-EL-2499	S <	-- Brake Light Override: Wire into rear warning lights above Flash Thru LX-1	1
06-EL-2501		-- Override Function: During ALL modes of operation	1
05-PM-LL30		-- (1) Center Rear Body Light: Whelen M6 Series, LED ILOS	1
05-PH-LF20		-- M6 Series Flange, Chrome Plated, Std: Each	1
05-PM-LRG9		-- Light: Whelen M6, LED, AMBER LED/AMBER Lens, Programmable ELECTRICAL - CELL 3	1
05-IL-12ML		-- Cab Ovhd Lights: Pair, Kinequip 4409, 4" Red/White LED	1
07-00-0182		-- Custom design wood console included in Order	1
06-00-0056	<	Secure Idle System E350/450 2021 + Cutaway Truck Installed- Kit installed by AEV with push button installed on Dash with labels in chassis cab.	1
11-ZZ-090D	<	-- CAAS GVS 3.0 Exception C.8.5.5 Lack of Automatic Anti-Theft device for Idling Exception notice for lack of an Automatic engaging security idle lock.	1
05-IL-2035	S <	Pre-wire, (2), For Customer Installed Rechargeable Flashlight, Locate (2) Prewires in Walk Thru  Exact Location TBD	2
05-IL-10L2		-- Location: Behind the Attendant's Seat on Left wall	2
05-IL-10P0	S	-- Powered: 12v Portable Equip	2
06-AL-4800	<	Hand Held Spot Light: Eagle Eye, Rubber Housing, With Cigar Plug Hook-07: Clip-onto spot light ring  REV# LITE-51LP	1
06-AM-SAHN		-- AEV Traumahawk Telematics Declined, Not required	1
06-BA-3F24		Batteries: 4 - Battery System - E-series Gas Only	1
06-BA-3FG1	<	-- Battery Make: (4) Random Make, Min OEM CCA/Ahr -E Series + M-8 Battery Brand in M-8 Compartment must match. add (2) BATT-FOEM	1



PART NO	S	DESCRIPTION	QTY
06-BA-3FM1		/-- Batt Loc: (T3) (1) Underhood, Remainder Batt M-8	1
06-BA-3FW2	<	/-- Emergency Start Circuit - (4) Battery System, Switch in Console 1 battery on slide out & 1 battery under hood to be primary starting batteries. 2 remaining batteries on slide out to be emergency start batteries.	1
06-BA-3FW9		/-- Batteries Wired: (2) Through charge relay system	1
06-EC-08A0	XS <	/-- Battery Switch & Auto-Shut-down (Circuit): 5 Minute ILOS Location: DRVR Side of Console	1
06-EB-13M2	S <	Cabinet Light(s): "DAY BRIGHT" LED White Light, Each Must state locations for light(s) : B,C, D, Cabinet Over CPR, I-2, I-3, J, K1, K2, O1  ALL Daybrights to Work w/ Check Out Timer IATS  Daybrights in I-2/I-3 Area to Work w/ M7 Compt Door Switch IATS and to go Around Entire RF ALS Cabinet Opening (Not M7)  ALL Daybrights to be Full Perimeter of Each Cabinet Opening (Up Wall 1, Across Top, and Down Wall 3) Including K Cabinets and Cabinet Over CPR Seat  Use Woven Looms for Daybrights	10
05-IL-13S0		/-- Cab Interior Lights Switching: in Patient Area Console	1
06-EB-13N2	<	/-- Light Track: "DAY BRIGHT" LED Light Track: Installed Must state cabinet choice locations	10
06-EC-0564		POWER Door Locks: Module Doors - Full Mod	1
06-EC-0505	<	/-- Door Locks, Tied into OEM System Select chassis Module power locks are tied to the Chassis power lock system	1
06-EC-0512	<	/-- OEM Key Fob: Included w/Chassis Unlock Mod Doors Must also operate the Module Power Door Locks Optioned.	1
06-EC-05C9		/-- Door Lock Switches : Integrated in Interior Entry door Handles	1
06-EC-05K0		/-- ONLY the following doors shall have power door locks:	1
06-EC-05L1		/-- Electric Door Lock: (M-1A) Upper Left Front Compartment,	1
06-EC-05M1		/-- Electric Door Lock: (M-1) Left Front Compartment	1
06-EC-05M2		/-- Electric Door Lock: (M-2) Left Middle Compartment	1
06-EC-05M4		/-- Electric Door Lock: (M-3) Left Rear Compartment	1
06-EC-05M6		/-- Electric Door Lock: Rear Access Doors	1
06-EC-05M7		/-- Electric Door Lock: (M-5) Right Rear Compartment	1
06-EC-05N0		/-- Electric Door Lock: Curbside Access Door	1
06-EC-05N1		/-- Electric Door Lock: (M-7) Right Front Compt	1
06-EC-2800	<	/-- Door Unlock Switch, Momentary, Exterior, hidden NOTE: Installation of Remote Door Lock Switch feature may increase likelihood of unauthorized entry into vehicle. By checking this option, purchaser further agrees to hold REV or chassis manufacturer harmless for any loss of vehicle or contents caused by unlawful access.	1
06-EC-0803		/-- Location: Recessed Tag Area	1
06-EC-3013	<	/-- 3rd Brake Light with back-up camera VCAHD140LB, White,Mirror Monitor CHECK THAT NO OTHER CAMERAS ARE SELECTED	1



PART NO	S	DESCRIPTION	QTY
06-EC-CBZ1	XS	< Circuit Board, 12 V: Multiplex LX1 E3/450, ILOS Includes the Following Items, please add to order: All the following need to be added as usual: Rear Digital Thermostat/Control for A/C, includes front also Door Open 15 minute check out timer Oxygen Contents Gauge front and back	1
06-EC-CB07		-- Circuit Protection, 12 V: FET - Auto-reset	1
06-EC-SPA7	<	-- LX1 Main Panel Front Display 7 inch full color w buttons STD 14 tactile pushbuttons with White LED backlight IP67 sealed.	1
06-EC-SPA8		-- In Cab Console	1
06-EC-SPA8		-- In Cab Console	1
06-EC-SPZ0		-- Patient Area LX1 Panel:	1
06-EC-SPZ1		-- Pt Area LX1 Switch Panel: One Standard In Patient Compartment	1
06-EC-SPA1		-- Switch Panel Located: Streetside A/A	1
06-EC-SP70		-- Patient area switch panel mounted :flat to action wall std	1
06-EC-SPZA		-- 2nd Pt Area LX1 Switch Panel: To be Located	1
06-EC-SPA3		-- Switch Panel Located: Curbside	1
06-EC-SP71		-- Patient area switch panel mounted on angled cabinet	1
06-RR-F301	S	<  -- CONSOLE, Engine Cover: Custom Wood E Series - 25-lbs. Battery Switch Located on DRVR Side of Console	1
06-RR-F311		-- Fasteners: Black finish screws into engine cover	1
07-RR-0201	<	-- Add-on Console: E/G-series console, 24" long model w 10" cab ext no sliding door 24" length only works for 10 inch cab extension with no sliding door.	1
07-RR-02A0		-- Drink Holder: (2) In Add-on Console, Big Gulp Size	2
07-RR-02A5		-- Drink Holder Location: Front	2
07-RR-02F0		-- Note Book Slot: Single - Full width by 6" wide	1
07-RR-02F3		-- Double removable Lexan Divider(s)	1
07-RR-2301		-- Customer Radio: Space for Customer installed Radio Heads	1
07-RR-02D8		-- Item location; Front Of Add-On Console Space	1
07-RR-2354		-- Glove Storage: (3) Glove Box Storage Across Rear of add on console	1
07-RR-24A0		-- Console Finish: Black, Textured "Easy Grip"	1
07-ZZ-ZZZZ		--	1
06-EC-4300		Back-up Alarm: Standard 102 DB	1
06-EC-43C0		-- Cut Off Switch: NONE	1
06-EC-GR01		Ground Straps, Module to Frame: (Qty 4) Braided Std With Star Washer	1
06-IA-0001		Converter , 125 V to 12 V: NONE	1
06-IG-0200		Inverter System: Ford Gas Engine Package (Only) Mod	1
06-IG-0250		-- Inverter : Vanner LIFESINE 1100 Pure Sine Wave, w 55 amp 3 stage charger	1
06-EC-03AS		-- Portable Equip Charging Circuits: Included in Inverter	1
06-EC-03AA		-- PREWIRE LOCATION: (1)Cab Console, (1) Behind A/A	1
06-EC-03C9		-- Portable Equip Pwr Source: Ignition and/or Shoreline	1
06-IG-03A0		-- Battery Charger/Conditioner: 55 A - Built into Inverter	1
06-IG-0003		-- Built-in Battery Charger: Enable - Wire to Batteries	1
06-IG-04C2		-- Lexan Cover: None	1
06-IG-04L7		-- Inverter Location: M-1A (ULF) Compartment	1
COMMUNICATION RADIO(S) RELATED			
RADIO POWER			
06-EC-0340	S	<  -- Radio Power No 1 Special 3 wire 30 Amp Battery Sw Hot, Ignition , and Ground 30 Amp - Battery Switch Hot Red Ignition Hot Orange	1

PART NO	S	DESCRIPTION	QTY
		<b>Ground Black</b>	
06-EC-03J0		-- LOCATION: Inside Cab Center Console	1
06-EC-0342	S <	-- Radio Power No 2 Special 3 wire 30 Amp Battery Sw Hot, Ignition , and Ground <b>30 Amp - Battery Switch Hot Red</b> <b>Ignition Hot Orange</b> <b>Ground Black</b>	1
06-EC-03J0		-- LOCATION: Inside Cab Center Console	1
06-EC-0344	S <	-- Radio Power No 3 Special 3 wire 30 Amp Battery Sw Hot, Ignition , and Ground IAT <b>30 Amp - Battery Switch Hot Red</b> <b>Ignition Hot Orange</b> <b>Ground Black</b>	1
06-EC-03E0	S <	-- LOCATION: Behind Action Area Board <b>ANTENNA LEADS</b> <b>Include Rubber Rain Caps for Antenna Bases</b>	1 1
06-RR-1710		-- Antenna Base w/ Coaxial Cable: KE794 #1	1
06-RR-01P0		-- Port Plate: None - Access thru center upholstery panel	1
06-RR-1760	<	-- Location: Roof Port #1 <b>Line up with edge of curbside entry door, centered side to side as near as possible.</b>	1
06-RR-1772		-- Termination Point: Inside Center Console	1
06-RR-1712		-- Antenna Base w/ Coaxial Cable: KE794 #2	1
06-RR-01O2	<	-- ORIGINATION POINT: Roof Port No 2 <b>Roof Port No 2 is located approximately 24 inches back rearward of roof port #1.</b>	1
06-RR-01P0		-- Port Plate: None - Access thru center upholstery panel	1
06-RR-1774		-- Termination Point: Behind A/A Board	1
06-RR-1300		-- Conduit No 1: 1 1/2", with pull wire	1
06-RR-13O1		-- CONDUIT ORIGINATION POINT: Electrical Circuit board cabinet	1
06-RR-13T6		-- CONDUIT TERMINATION POINT: In Cab Console	1
06-RR-13A3	S	-- Conduit No 3: 1 1/2", with pull wire	1
06-RR-13O1		-- CONDUIT ORIGINATION POINT: Electrical Circuit board cabinet	1
06-RR-13T3		-- CONDUIT TERMINATION POINT: Behind A/A Board (Panel)	1
06-RR-13C0		-- Conduit No 2: 1 1/2", with pull wire	1
06-RR-13O1		-- CONDUIT ORIGINATION POINT: Electrical Circuit board cabinet	1
06-RR-13T4	S	-- CONDUIT TERMINATION POINT: M-1A compartment	1
06-RR-1809		-- Patient Area Radio : None	1
06-SO-0000		125 V SHORE LINE AND OUTLETS	1
06-SO-0500	<	-- Shore Line Inlet: 20 A Super Auto Eject, ILOS <b>&gt;&gt; Access plate either interior or exterior mounting plate required &lt;&lt;</b>	1
06-SO-00L1		-- Inlet location: Aft of Left Front compartment	1
06-SO-0801	<	-- Indicator Light, Shore line: Weather proof, power by SL, Green <b>Indicator light located above shore line inlet.</b>	1
06-SO-1010		-- Cover, White, Shore Line Inlet : 20 A Super Auto Eject, ILOS	1
06-SO-10TT	<	-- Inpower Timer: VCM-05-01SF, Installed <b>NOTE: This allows the auto eject to be wired to the ignition switch In lieu of splicing into the OEM starter circuit and is required any this vehicle</b>	1



PART NO	S	DESCRIPTION	QTY
06-SO-1400		-- **125 Volt OUTLETS**	1
06-SO-13N1		-- 125 V W/ Dual USB (1-A & 1-C) & Power Light Outlet #1: 20 A, White ILOS	1
06-SO-14L1		-- LOCATION: Action Area, standard location	1
06-SO-14O2		-- Outlet mounting ORIENTATION: Vertical	1
06-SO-13N2		-- 125 V W/ Dual USB (1-A & 1-C) & Power Light Outlet #2: 20 A, White ILOS	1
06-SO-14L3		-- LOCATION: RF ALS, (See Drawing)	1
06-SO-14O2		-- Outlet mounting ORIENTATION: Vertical	1
06-SO-13N3		-- 125 V W/ Dual USB (1-A & 1-C) & Power Light Outlet #3: 20 A, Hosp Grade White IA	1
06-SO-14L2		-- LOCATION: Curbside, see Drawing	1
06-SO-14O2		-- Outlet mounting ORIENTATION: Vertical	1
06-SO-1100		**INTERIOR 12 Volt OUTLETS**	1
06-SO-1101		-- 12 V Outlet, No 1: Power Point Double Outlet- Wire thru Med Isolator	1
06-SO-11L1		-- LOCATION: Action Area, standard location	1
06-SO-14O2		-- Outlet mounting ORIENTATION: Vertical	1
06-SO-1910		-- Power Source: Medical Isolator , Batt Sw Hot	1
06-SO-1103		-- 12 V Outlet, No 3: Power Point - Single -Wire thru Med Isolator	1
06-SO-11L3		-- LOCATION: RF ALS, (See Drawing)	1
06-SO-14O2		-- Outlet mounting ORIENTATION: Vertical	1
06-SO-1913		-- Power Source: The SAME as outlet No 1	1
06-SO-1124		-- 12 V Outlets, Double Receptacle (SOCK-04C), IATS	1
06-SO-1910		-- Power Source: Medical Isolator , Batt Sw Hot	1
06-SO-11L8		-- LOCATION: In Cab Console	1
06-SS-0700		Siren: Whelen, WS295HFSC9, E-Series	1
06-SS-DF04	S <	-- Siren Speakers: Federal # ES100-ESMFT-EF, E Series ILOS Shipped Loose for Dealer Install Do Not Cut Into OEM Bumper	1
06-SS-SW01		-- Siren / OEM Horn Switch: In Cab Console	1
06-SS-SW04		-- microphone clip not installed Tie to Siren Microphone cord.	1
06-SS-1300		Air Horn System:	1
06-SS-1304	S	-- Air Horns ACTIVATION: White Rocker Switch in Console	1
06-SS-1305		-- Air Tank Mounted to Frame Rail	1
06-SS-1310		-- Emergency Master Hot	1
06-SS-1340		-- Compressor: Buell #6540/5540 20% Oil less Intermittent Duty	1
06-SS-1347		-- Compressor Location: M-1A Compartment	1
06-SS-13E1	S <	-- Air Horn Location: Under Front Bumper, E-Series Trumpets shall emit sound through REV created cutouts in the OEM plastic valance panel, below the front bumper.  Shipped Loose for Dealer Install Do Not Cut Into OEM Bumper	1
06-SS-1321		-- Left Air Horn: 10" Buel Strombos Horn, Chrome, No 1061 (493 Hz)	1
06-SS-1332		-- Right Air Horn: 12" Strombos Horn, Chrome, No 1062 (396 Hz)	1
06-SS-13M0		-- Air horn mounted system Standard chrome finish	2
	<	CABINET SHOP - Modular Cabinet Shop Note:  All Round Pull Latches or Lever Latches to have STOP-05A 5.5" Latch Catches  Upper Cabinets to have Sweep Outs  Mica Edges of All Shelves  All Reel Torque Hinges to have Acorn Nuts or Shorter Bolts (No Rivets)  ***Use Wider Trim*** REF 200F25849XW	

PART NO	S	DESCRIPTION	QTY
		"U" Shaped Trim on All Solid Cabinet Doors and Drawers (All Sides)	
		"J" or 3/4" Angle Trim on All Cabinet Openings - Use Wider Trim (3/4" Angle Trim) in Place of "J" Trim Wherever Possible (for Flip Up Lexan Doors, Trim Around Entire Opening Except Hinge Side)	
		Use Alum Trim ILOS Welting Wherever Possible (Leave Welting at Ceiling Level Around the Upper Cabinets)	
		Use Small Clear Rubber Bumpers for Cabinet Doors that Come in Contact with Walls/Ceiling	
07-00-0182		-- Custom design wood console included in Order	1
07-00-0001		< ALL DIMENSIONS ON ORDER WILL HAVE A VARIABLE OF + OR - 1/4" Unless specified as a minimum dimension.	1
		Cabinet Configuration	
07-00-0008	S	TPR Matt on cabinet Floors, Drawers & Shelves, X Upgrade	1
07-00-164E		CABINET CONSTRUCTION, GENERAL, 164 X 95 E-SERIES	1
07-00-BH01		< BULKHEAD PANELS: See Station 5 See Station 5 portion of shop order to find DOOR info.	1
07-00-MC02		Mica Color: Gloss Gray D355-01	1
07-00-N002		-- All Cabinet interiors Standard Pre-laminated > WHITE	1
07-00-PC0N		Polycarbonate Type/Color: Lexan - CLEAR Secure Latch	1
07-02-0074		-- Att Seat: EVS, Comfort 1780 Black, Vacuum Form, Per4Max Black belt	1
07-SE-0900		<  -- BASE: Swivel base for EVS Seat Option 8 position ILOS BASE-188S SB-8	1
11-SE-04A0		-- Attendant Seat, Armrest: None	1
07-AC-6403		AC CABINET: Evaporator, Location Behind Att Seat Faces Rearward ILOS	1
07-ZZ-ZZZZ		--	1
07-BH-6401		Bulkhead Cabinet "J": Standard	1
07-BH-6402		-- Cabinet "J": Over Att Seat	1
07-DR-LX24		-- Door: Single Flip Up 3/8" Lexan	1
07-DR-LZ20		-- Hinges: Reel Torque	1
07-HW-SO11		-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated	1
07-ZZ-ZZZZ		--	1
07-CA-04A8		Cabinet, (3) Glove Storage, over C/S Entry Door	1
07-DR-LX04		-- Door: Overlay He, 3/8" Lexan - 3-glove dispense thru	1
07-HW-SO11		-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated	1
07-ZZ-ZZZZ		--	1
07-CA-0300	S	< CURBSIDE UPPER: Over S/B, Mods Wood cabinet, White Interior IATS Note 74" HR, Increase K Cabinet Ht Accordingly, Leave 43" of Space between Bottom of Cabinet and Seat Cushions	1
07-CU-K107		-- Cabinet K1 & K2: (2) Openings with flush center divider	1
07-DR-LX24		-- Door: Single Flip Up 3/8" Lexan	2
07-DR-LZ20		-- Hinges: Reel Torque	2
07-HW-SO11		-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated	2
07-ZZ-ZZZZ		--	1
07-CA-04A9		< Cabinet, (2) Glove Storage, over Rear Entry Doors Two glove dispenser over rear doors, (1) on each side of clock.	1
07-DR-LX04	S	-- Door: Overlay He, 3/8" Lexan - 2glove dispense thru	1



PART NO	S	DESCRIPTION	QTY
07-HW-SO11		-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated	1
07-ZZ-ZZZZ		--	1
07-CA-04B0		CURBSIDE REAR STORAGE CABINET: NONE	1
07-ZZ-ZZZZ		--	1
07-LF-6401	S	< LF Cabinet, Behind Att Seat: Cabinet "H"/ (Elec Cab) Facing Rear	1
07-CA-VEN7		-- Plastic Vent: (2) Total, 1 column x 8 row, Vent 01	1
07-DR-WD0E		-- Door, Single Solid Flush Fitted Electrical Area	1
07-CA-2100		-- TRIM: U-shaped Door, J-trim opening	1
07-DR-OR03		-- Hinge Orientation: LEFT	1
07-HW-HIN1		-- Hinge: 1 1/2" Stainless Steel Piano Hinge	1
07-HW-SO11		-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated	1
07-ZZ-ZZZZ		--	1
07-RF-6401		RF ALS Cabinet: Standard	1
07-RF-I164		-- Cabinet I-1: Standard	1
07-DR-WD00		-- Door, Single Solid, Flush Fitted	1
07-CA-2100		-- TRIM: U-shaped Door, J-trim opening	1
07-DR-OR01		-- Hinge Orientation: TOP	1
27-RF-I220		-- Gas strut mini hold open installed for cabinet top hinged door	1
07-HW-HIN1		-- Hinge: 1 1/2" Stainless Steel Piano Hinge	1
07-HW-REGR	<	-- Combination Lock: COMPX Regulator Right hand horizontal self locking Each COMPX Regulator self locking with keypad, REG -S-R-3 Right hand horizontal with 1 3/16" length cylinder with self closing latch. Allows for the door to be slam latch style. System provides one supervisor code, and one User code	1
07-HW-SO12		-- Round Pull Latch: Locking - Chrome Finish - 10 lb rated	1
07-ZZ-ZZZZ		--	1
07-RF-I264	S	-- Cabinet I-2: Same Size as I-3	1
07-DR-WD04		-- Doors, Double Solid, Flush Fitted: W/ Lexan Insert	1
07-CA-21A0		-- TRIM: U-shaped Door, J-trim opening, DBL DRS	1
07-DR-M907	<	-- Cable stop installed on door (Each) >> Customer confirms angle ??	1
07-DR-OR05		-- Hinge Orientation: (1) RIGHT and (1) LEFT	1
07-HW-HIN1		-- Hinge: 1 1/2" Stainless Steel Piano Hinge	2
07-HW-SO11		-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated	2
07-RA-IOA1		-- Outside Access: Thru M-7 (RF) Compartment door.	1
07-RF-0001		-- Interior MICA Color: White cabinet liner	1
07-TS-1200		-- Shelf Track: Small alum Unistrut type	1
07-CA-0608	<	-- (2) Shelves: Adjustable mica over substrate with Alum Trim (1) Adj Shelf in I-2 Area and (1) in I-3	1
07-RF-I268	S	-- Cabinet I-3: Same Size as I-2	1
07-DR-WD04		-- Doors, Double Solid, Flush Fitted: W/ Lexan Insert	1
07-CA-21A0		-- TRIM: U-shaped Door, J-trim opening, DBL DRS	1
07-DR-M907	<	-- Cable stop installed on door (Each) >> Customer confirms angle ??	1
07-DR-OR05		-- Hinge Orientation: (1) RIGHT and (1) LEFT	1
07-HW-HIN1		-- Hinge: 1 1/2" Stainless Steel Piano Hinge	2
07-HW-SO11		-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated	2
07-RA-IOA1		-- Outside Access: Thru M-7 (RF) Compartment door.	1
07-RF-0001		-- Interior MICA Color: White cabinet liner	1
07-RR-0064		Right Rear Cabinet: Cover over M-5 Compartment	1



PART NO	S	DESCRIPTION	QTY
07-RR-0364	<	<p><i>/-- Inside access into M-5: Face Aisle</i></p> <p><b>The inside access opening shall positioned on the forward half of M-5 compartment.</b></p> <p><b>The clear opening shall be 10" wide by 36" tall.</b></p>	1
07-DR-ST10		<i>/-- Door, Single, Overlay Hinged, 3/8" Lexan - (Include)</i>	1
07-DR-OR04		<i>/-- Hinge Orientation: RIGHT</i>	1
07-HW-SO11		<i>/-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated</i>	1
07-ZZ-ZZZZ		<i>/--</i>	1
07-SA-0000			1
07-SB-6401		SQUAD BENCH: Standard 164-172	1
07-SB-0001		<i>/-- See Upholstery Section for Post and Wheel Cup info</i>	1
07-SB-1021	S <	<p><i>/-- Bio-waste/Sharps No 1: (1) Tilt-out Door (Squad Bench)</i></p> <p><b>Tilt Out w/ Access Slots</b></p>	1
07-HW-SO11		<i>/-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated</i>	1
07-SB-1003		<i>/-- LOCATION: At head of Squad Bench</i>	1
07-SB-1005		<i>/-- WASTE CONTAINER: 6 Quart std -CANO-04G</i>	1
07-SB-100A	S	<i>/-- SHARPS CONTAINER: 5-Quart Kendall</i>	1
07-SB-1001		<i>/-- Storage Under Lid - Configure to M-6 Compartment Size</i>	1
07-SB-LID2		<i>/-- Squad Bench Lids: Split - 2-section</i>	1
07-SB-LH00		<i>/-- Hinge, Squad Bench Lid(s): Butt Style Hinges</i>	1
07-SB-LH03		<i>/-- Lid Checks: Gas shock, Dual Action</i>	2
07-SB-LH08		<i>/-- Latch, Bench Lid: Slam Action , KITS-SBL - Surface mount 40 LBS each</i>	2
07-TR-SB01		<i>/-- Edge Trim, Lids: Band w/ Laminate and J-Trim Protection</i>	1
08-MH-1400	<	<p><i>/-- Restraint Net, Black, 7 point detachable, at head of S/B, Mod</i></p> <p><b>Seven (7) NET Attachment Points:</b></p> <p><b>Black in color.</b></p> <p><b>NETS-MOD2</b></p>	1
08-ZZ-ZZZZ		<i>/--</i>	1
07-TC-6401		TOP CABINETS, - Standard	1
07-TC-A646	<	<p><i>/-- Cabinet A Deleted, Combine space with Cabinet D</i></p> <p><b>Cabinet D extends over next to Exhaust fan</b></p>	1
07-TC-B641		<i>/-- Cabinet B: Ergonomically angled toward the CPR seat</i>	1
07-TS-1200		<i>/-- Shelf Track: Small alum Unistrut type</i>	1
07-CA-0608	<	<p><i>/-- (2) Shelves: Adjustable mica over substrate with Alum Trim</i></p> <p><b>(1) Each side of Divider</b></p>	1
07-CB-DR30		<i>/-- Doors; Cabinet B Secure Latch Sliding Window -40 LB</i>	1
07-ZZ-ZZZZ		<i>/--</i>	1
07-TC-C641	S <	<p><i>/-- Cabinet Over CPR: Over Extra Wide Side seat</i></p> <p><b>Note 74" HR, Increase Cabinet Ht Accordingly, Leave 43" of Space between Bottom of Cabinet and Seat Cushions</b></p>	1
07-DR-LX24		<i>/-- Door: Single Flip Up 3/8" Lexan</i>	1
07-DR-LZ20		<i>/-- Hinges: Reel Torque</i>	1
07-HW-SO11		<i>/-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated</i>	1
07-ZZ-ZZZZ		<i>/--</i>	1
07-WC-0000			1
07-WC-6401		WALL CABINET: CPR Seat w/Telemetry Type 3	1
07-WC-AA01		<i>/-- Action Area: Standard</i>	1
07-CA-4800	<	<p><i>/-- 1/2" Solid Surface A/A Tray</i></p> <p><b>The tray shall have a lip. The tray lip shall come up to the front and overlay the face.</b></p> <p><b>Interior edge will be 90 degree, as of 05/08/2024</b></p>	1

PART NO	S	DESCRIPTION	QTY
07-CA-4820		-- Solid Surface Material COLOR: Steel Gray Tempest 9194TM	1
07-CA-4U05		-- Solid Surface extension in front of O1	1
07-WC-AABD		-- Action Area Board: Black Grip See Station No 6 for content	1
07-ZZ-ZZZZ		--	1
07-WC-C641		-- Cabinet C: Standard	1
07-CB-DR34		-- Doors; Cabinet C Secure Latch Sliding Window -40 lb	1
07-RF-0009		-- Inside Access / Outside Access	1
07-ZZ-ZZZZ		--	1
07-WC-D641	S	-- Cabinet D: Non Angled	1
07-TS-1200		-- Shelf Track: Small alum Unistrut type	1
07-CA-0608	<	-- (2) Shelves: Adjustable mica over substrate with Alum Trim	1
		(1) Each side of Divider	
07-CB-DR36		-- Doors; Cabinet D Secure Latch Sliding Window -40 pound	1
07-ZZ-ZZZZ		--	1
07-WC-E003		-- Cabinet E: DELETE	1
07-ZZ-ZZZZ		--	1
07-WC-F000		-- Cabinet F: DELETE	1
07-ZZ-ZZZZ		--	1
07-WC-SS02	<	-- Side Seat: 24" - Single Position - Under Lid Storage w/Latch	1
		Side Seat to be Wider than Std	
07-SB-LH08		-- Latch, Bench Lid: Slam Action , KITS-SBL - Surface mount 40 LBS each	1
07-WC-BA00		-- Hinge, CPR Seat Lid(s): Butt Style Hinges	1
07-WC-BR01		-- Back Rest: Fixed to Back Wall of CPR Seat w/clips	1
07-WC-ST52		-- CPR Seat, Lid check Gas shock dual action installed	1
07-WC-TA01	S	-- Telemetry Area: DELETE/NONE	1
07-WC-O101		-- Cabinet O1: Standard	1
07-TS-1200		-- Shelf Track: Small alum Unistrut type	1
07-CA-0600		-- (1) Shelf: Shelf: Adjustable, Mica over substrate	1
07-CB-DRLY		-- Door: Single Overlay Lexan Hinged Right	1
07-HW-SO11		-- Round Pull Latch: Non-locking - Chrome Finish ILOS -10 lb rated	1
07-WC-VD98		-- Cylinder Viewing Window: Left Hinged Lexan 3/8"- Round Non-Locking Latch	1
08-SE-1702		-- P4 - 4-Point PER4MAX Restraint System - W/CPR	1
08-SE-1820	<	-- (2) on Squad Bench, (1) CPR Side Seat Per4Max Black Belts	1
		Belt retractors must mount below the top of the seat.	
08-SE-SB70		-- S/B: (3) Sec patient restraints - 9" Sleeves Face of Bench	1
08-SE-SB76		-- S/B: (3) Sec patient restraints - 5" Sleeves By Hinge	1
08-SF-0010		-- Mod Single Color VAC Form Tombstone Backrest with Separate Headrest	3
08-SF-0110		-- Single Color Backrest and Headblock Black Each	3
07-ZZ-ZZZZ			1
CABINET SET - CELL 4 - MOD			
08-00-00PW		Sub Floor, 3/4" Plywood, Standard	1
08-00-FL3A		Flooring: Loncoin II Flecks- #150, Onyx (Black)	1
08-00-FL01		-- Flooring Main Edge: 3" Recessed (1/2" deep) roll-up	1
08-AS-0001	<	-- Rear Threshold, Stainless, 6" Wide x Full Width at rear doors	1
		Install safety yellow with diagonal stripes nonskid tape over threshold.	
08-AS-0006		-- C/S Stepwell Threshold, Polished Diamond Plate	1
08-ZZ-ZZZZ		--	1
08-CS-0001	S	< COT MOUNT HARDWARE: (Full Size Mod)	1
		Leave 1/8" of Clearance Around the Widest Dimension of the Stryker Floor Plate, to be Removable without Interfering with Rear Threshold or Other Components	
		Apply Silicone to Gap	



PART NO	S	DESCRIPTION	QTY
08-CR-09PP	<	<p> -- Cot Mount: Stryker, No 6390, Power Load, Prep ONLY &gt;&gt;NON COMPLIANT &lt;&lt;  This will have everything need for Customer/Dealer to install the Stryker Power Load system at a later date.  Constant hot and ground service power provided,  Prep will include, installation of Floor Plate Kit  THIS DOES NOT INCLUDE ANY COT MOUNT  &gt;&gt;&gt;&gt;&gt; EXCEPTION TO 3.11.6 &gt;&gt; THIS is an incomplete installation, an exception is required,  NON COMPLIANT installation.</p>	1
08-CR-0420		-- Non-Compliant to SAE J3027, J3102 3.11.6 Patient Cot Mount Notice	1
08-CR-0421		-- Non-Compliant to SAE J3027, AMD 004 CAAS GV 3.0 C.11.6	1
08-CR-09PN		-- mass casualty kit not requested	1
08-CR-1001	<	<p> -- 12 v power for cot mount provided up through floor  12volt power for power load to be brought through floor, with Heat shrink connectors installed</p>	1
08-CS-00PL	<	<p> -- Cot Position No 1: PRIMARY CENTER POSITION,  Maintain 12" between Cot and S/B.</p>	1
08-CS-2000	<	<p> -- Primary Cot position under floor reinforcement  Install 8 inch wide by 5 long 1/2" aluminum reinforcement at primary cot position.  (Pimary cot position only - REV Std)  **If custom location is desired, must be specified below.</p>	1
08-CS-3009		-- Cot mount set up for: Stryker Power-Pro 6506	1
08-CS-3009		-- Cot mount set up for: Stryker Power-Pro 6506	1
08-OS-04ST		OXYGEN / AIR / VACUUM System:	1
08-OS-0401		-- O2 Outlet No 1: Ohio/Diamond/Ohmeda	1
08-OS-040A		-- LOCATION: Action Area	1
08-OS-0402		-- O2 Outlet No 2: Ohio/Diamond/Ohmeda	1
08-OS-040A		-- LOCATION: Action Area	1
08-OS-0403		-- O2 Outlet No 3 Ohio/Diamond/Ohmeda	1
08-OS-040E		-- LOCATION: Curbside, in head of cabinet, over head of S/B	1
08-OS-0904	<	<p> -- Port Cyl Rack No 1: Zico QR-D-2 - D or Jumbo D - No Strap Req  Through bolt the rack to metal.</p> <p>Locate in Walk Thru</p>	1
08-OS-0905	S <	<p> -- Port Cyl Rack No 2: Zico QR-D-2 - D or Jumbo D - No Strap Req  Through bolt the rack to metal.</p> <p>Locate in Walk Thru</p>	1
08-OS-04V2	<	<p> -- Compartment Door Oxygen Mount with Lift Austin Hardware OBS-HS-L ILOS  Compartment door to be reinforced, unit mounted to door.  minimum width requires Engineering approval of compartment size and contents.  initial requirements minimum 59 inches, height, 19 inch width, 12 inch intrusion with door closed.  Lift includes Neck collar, retaining straps. All must be fully engaged on bottle at all times.  accommodates H-Steel bottle, M-Steel, and M- Aluminum  compartment door sensor to interlock kneeling suspension.  Lift travel capable of up to 27 inch downward.  operation sticker included to mount in visible location on small lexan plate.</p>	1
08-OS-0810		-- Oxygen Hose Retractor: Hubbell Tool Balancer	1
08-OS-11G1		-- Cylinder Type: OXYGEN - Green Colored Hose	1

PART NO	S	DESCRIPTION	QTY
08-OS-1710	<	-- Regulator, Oxygen, Fixed output @ 50 psi +/-5, CGA 540, Installed STD <b>Regulator Has LX1 Transducer ILOS</b>	1
08-OS-1902		-- Regulator Wrench: Cast aluminum, OXYGEN w/ cable lanyard	1
08-OS-1400	<	-- Electric Oxygen, 12 V solenoid valve w/ manual by-pass <b>Location: In Action Area</b>	1
08-OS-35ST		-- Vacuum System: SSCOR regulator/gauge panel in A/A	1
08-OS-3514	S <	-- Collection Canister w Clip Bemis, 1200 CC Capacity In recess below AA <b>Location: Recessed under the action area.</b>  <b>No ABS, Use Alum Trim</b>	1
08-OS-3502		-- VAC Plumbing: Direct from panel to canister - NO Outlet	1
08-OS-3503		-- Vacuum Pump: 49 State	1
08-OS-3518		-- Location: M-1a Compartment TRIM / DOOR ASSEMBLY - CELL 5	1
09-00-001D		-- Soft Touch Trim Kit: Installed (Per Cabinet) - ILOS	5
09-00-001K	S <	-- Soft Touch Trim Color: Black <b>Use Soft Touch ILOS Trim Wherever Possible on Horizontal/Vertical Edges and Corners</b>	5
09-00-002S		-- Interior window and aluminum trim with standard satin finish- std	1
09-FE-05ST		-- Fire Extinguisher, 5 pound, Installed, IATS	1
09-FE-04L3	XS	-- Fire extinguisher installed in M2 Compt	1
09-FE-0621	<	-- Fire Extinguisher mounting bracket - Use std fork with band included Installed <b>Compliant mount when mounted vertically ONLY. do not lay down this bracket.</b>	1
09-00-0001			1
09-00-0002		*****DOOR DEPARTMENT - Full Mod*****	1
02-BT-C853		-- Handles, Ext: Tri-mark 030-1875, Free Float, Polished CNNC finish	1
02-BT-C85A		-- Interior Release: All Entry Doors, with bezel Emergency Access	1
09-MH-2531	<	-- Grab Rail, (1), 18" Yellow Antimicrobial Rear Entry Assist std. <b>Located : Module interior at the rear entry, mounted to the M5 compartment filler. Rail is to be through bolted into M5.</b>	1
09-MH-2706		-- Grab Rail, C/S wall, curve out over C/S Entry, Yellow Antimicrobial	1
09-B1-ED00		Entry Door Panels, Windows and Hardware	1
08-MH-0020		-- Interior Grab Handle Color: Yellow Antimicrobial	1
08-MH-0318	<	-- Grab Handle, CS Entry: (1) 3-pt "L" Shaped 90, Yellow Antimicrobial ILOS <b>Install CS door handle after cabinet installation. Close the doors and check for pinch points or cabinet interference.</b>	1
08-MH-03E8		-- Grab Handles, Rear Access: (2) 3-pt "L" Shaped 90, Yellow Antimicrobial	1
09-AS-0700	<	-- Door Panels: Mica over Smooth Alum/Uph/Alum DP Lower <b>The mica is laminated to smooth aluminum.</b>	1
09-AS-2510		-- Curbside Lower Door Panel: Diamond Plate	1
09-WI-02A0		-- UPPER Windows: RA Doors, Fixed Tinted Glass 16.3"W x 19.3"H Recessed	1
09-WI-0600	<	-- UPPER Window: CS Access, Fixed Glass, std tint -Recessed <b>WIND-FIXED</b>	1




PART NO	S	DESCRIPTION	QTY
09-DR-WT01		< <b>Walk through Door: NONE - DELETE</b> <b>Delete's Walk through Door. Walk through from Cab to Modular remains.</b>	1
09-FM-1093		-- <b>Dri-Dek Compt Floors and shelves, Black</b>	1
09-FM-11F7		-- <b>Dri-Dek EDGES: Yellow, Beveled frontal edges</b>	1
07-ZZ-ZZZZ		--	1
		<b>ELECTRICAL Point to Point - CELL 6</b>	
10-00-0110		<  -- <b>Space for recess full body comm. radio head at action area</b> <b>Full body radio to be installed after factory delivery</b> <b>Depth required for full body radio</b>	1
10-IL-02ST		Action Area Light: 12 V, LED, Surface Mount	1
10-IL-02L7		-- Light Location: Action Area	1
		<b>UPHOLSTERY - CELL 7</b>	
11-00-UB95		< <b>Upholstery Color: Black UPHO-6905</b> <b>UPHO-6905</b>	1
11-00-UC11		-- <b>Center Trough Upholstery Color: Color Key to Rest of Truck</b>	1
11-00-UT05		Uph Joint Type: Vacuum Formed - Seamless	1
11-05-0015		Cab Extension Dove Gray Vinyl Standard	1
11-SB-0005		Squad Bench seat cushion cut-outs: None	1
11-SB-0003		-- Post And Wheel Cups: NONE	1
11-SE-CSPD		Head Protection: Pad over CS Entry Door	1
11-SE-REPD		Head Protection: 2" Pad over Rear Access Doors, Full Width	1
11-MC-1630		<  -- <b>Clock, Digital 12 VDC, BRG SA625 2.5" tall Red Number 24 HR format</b> <b>.Clock set to RED number, 24 Hour format, 12volt constant power</b>	1
11-MC-1800		-- <b>Location: Over Rear Doors</b>	1
		<b>PAINT - STRIPES - DECALS PPG</b>	
12-PT-UNCT		-- Undercoating: Per QVM Guidelines, STD	1
12-DC-0001		Reflective Tape: White Reflective On Painted edges of Exterior Door Frame	1
12-DC-GA10		Compartment Finish: Diamond Plate Standard	1
12-PT-0100	S	< <b>Primary (Over All) Color: Overall Ford Race Red w/ White Modular Roof</b> <b>AEV Paint Graphics Estimate #03322</b>  <b>Chassis to be Ordered OEM Ford Race Red</b>  <b>Modular Body to be Painted to Match the Chassis</b> <b>White From the Drip Rails Up and onto the Roof</b>	1
12-DC-0002		-- Flip Step Reflective/Prismatic Tape: Red/White/R/W/R/W/R	1
12-PT-0112		-- Tape Stripe: NONE (KKK-F Deviation)	1
12-PT-0600		-- Paint Belt: NONE	1
12-PT-1000		-- Pin Stripe: NONE	1
12-ZZ-ZZZZ		--	1
12-PT-RF01		-- Roof Paint: Same color as module body, Matte Finish	1
12-PT-2000		Lettering: NONE	1
12-ZZ-ZZZZ		--	1
12-PT-DRIS		< <b>Drip Rails: Bright Alum, De-burred &amp; rounded corners (SHIPPED LOOSE)</b> <b>Include a drip rail over the C/S Entry Door shipped loose.</b>  <b>Add Shop Note to Shipped Loose Section of W/O</b>	1
		<b>DETAIL - SHIP LOOSE ITEMS</b>	

PART NO	S	DESCRIPTION	QTY
12-PT-DRIZ	<	-- Drip Rails: Detail-Refer to Paint Section for Drip Rail Information Include a drip rail over the C/S Entry Door.	1
13-00-0200		-- *Check front of W/O under chassis section for Add' items*	1
13-10-XM00		-- Owner's Manual USB Flash Drive ship loose	1
13-10-XMA0		-- Printed Owner's Manual Not Required	1
13-00-0001	S	Ship Additonal Fuel Lables Loose	1
13-GL-0000		Glove Holder, Ship Loose: NONE	1
13-KK-KDEC		Decals: KKK / DOT Pkg, Blue/White reflective - Ship Loose	1
13-RF-STAR		-- Decals: Install 32" Star of Life on Mod Roof	1
13-KK-NSSB		Decals: NO SMOKING & SEATBELT, installed, cab & pt. area.	1
13-KL-0013		AEV Logos: SHIP LOOSE, Not Installed	1
13-MH-05S0		Fire Extinguisher : Ship Loose : NONE	1
11-YZ-0932	S	--	1
11-ZZ-0932	S	--	1
13-MH-10A3	<	Reflector Pkg: SHIP LOOSE, For Body - 2 ea, Side Fr Amb, Side Rr Rd, Rr Stick-on reflectors: Peterson "Spitfire" B484R and B484A LOCATIONS: In lower corners of module (2) - (1) each side and Front - AMBER (2) - (1) each side and Rear - RED (2) - On Rear of body - RED	1
13-MR-0000		Convex Mirrors: None	1
13-SB-0003		Post And Wheel Cups: NONE	1
13-SP-TIRE		Spare Tire: Refer To Chassis Section to See if it gets one.	1
34-XX-5000	<	Indemnification Statement The purchaser agrees to defend, indemnify and hold REV harmless from any claims, costs (including actual attorneys' fees), damages and liabilities caused in whole or in part by any alteration or modification of, or changes or additions to the Purchased Products OR use of product for purposes it was not designed or intended for.	1
34-ZZ-ZZZZ		== 164-172 x 95 T-3 E450 Base Price - 38.004 11/04/24 == GENERAL CONVERSION	1
03-16-004D		164+ E450 Drw CONV PKG 24-1 08/10/23	1
36-AA-0001		WORK ORDER STATUS:	1
36-EO-0001		-- ***END OF ORDER***	1



WHELEN M SERIES LED WARNING LIGHT SYSTEM

(RED, RED, WHITE, RED, WHITE, RED, RED, RED)

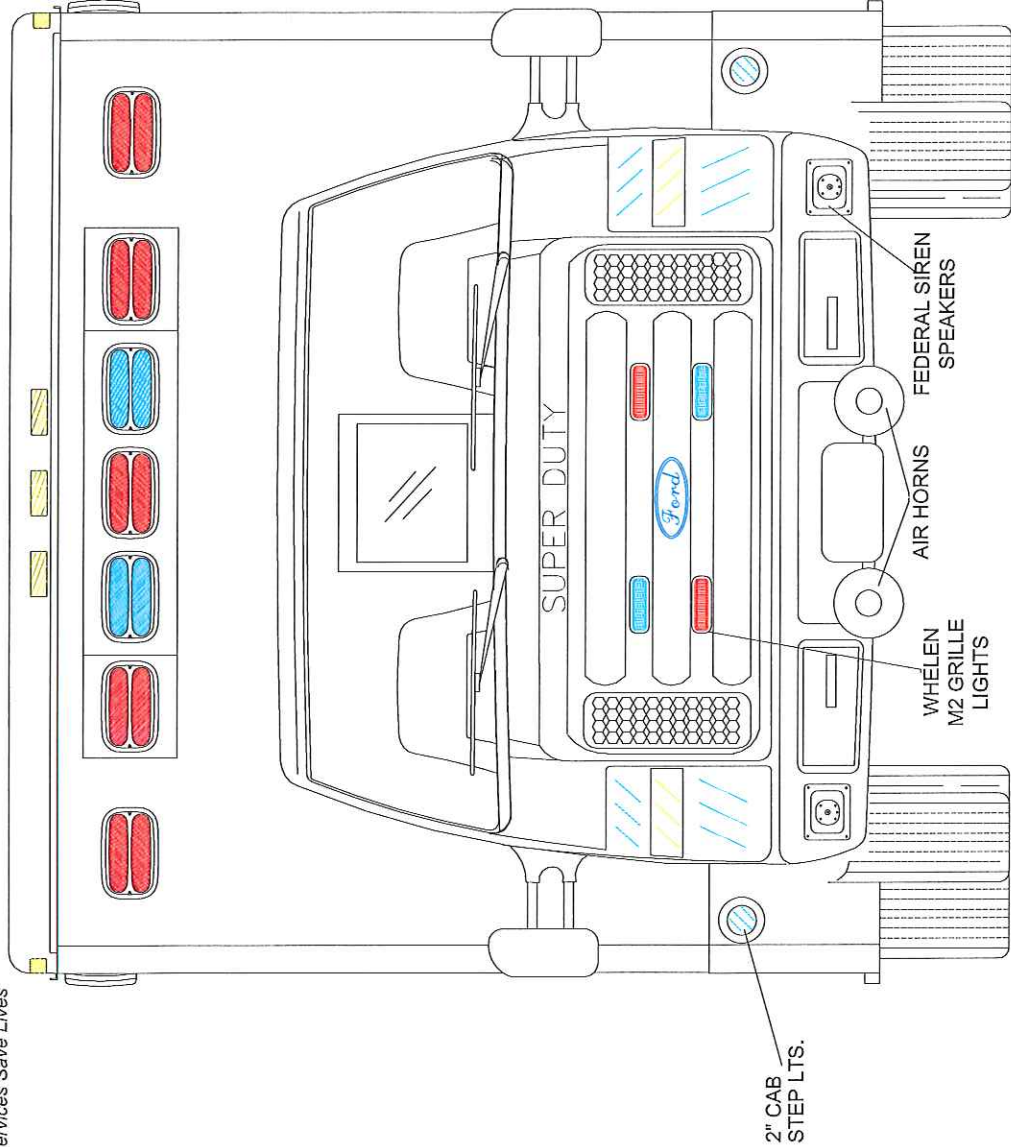

CUSTOMER: BERLIN EMERGENCY MEDICAL SERVICE

CHASSIS

DATE: 12-11-2024

TYPE 3, FORD E450 , GASOLINE

SECURE IDLE SYSTEM

POWER DOOR LOCK- FULL MODULE


REVISION#

MODULE DIMENSIONS: 172" x 96" x 74" HR

X SERIES INSULATION PACKAGE

BY: XQB

CONCEPTUAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

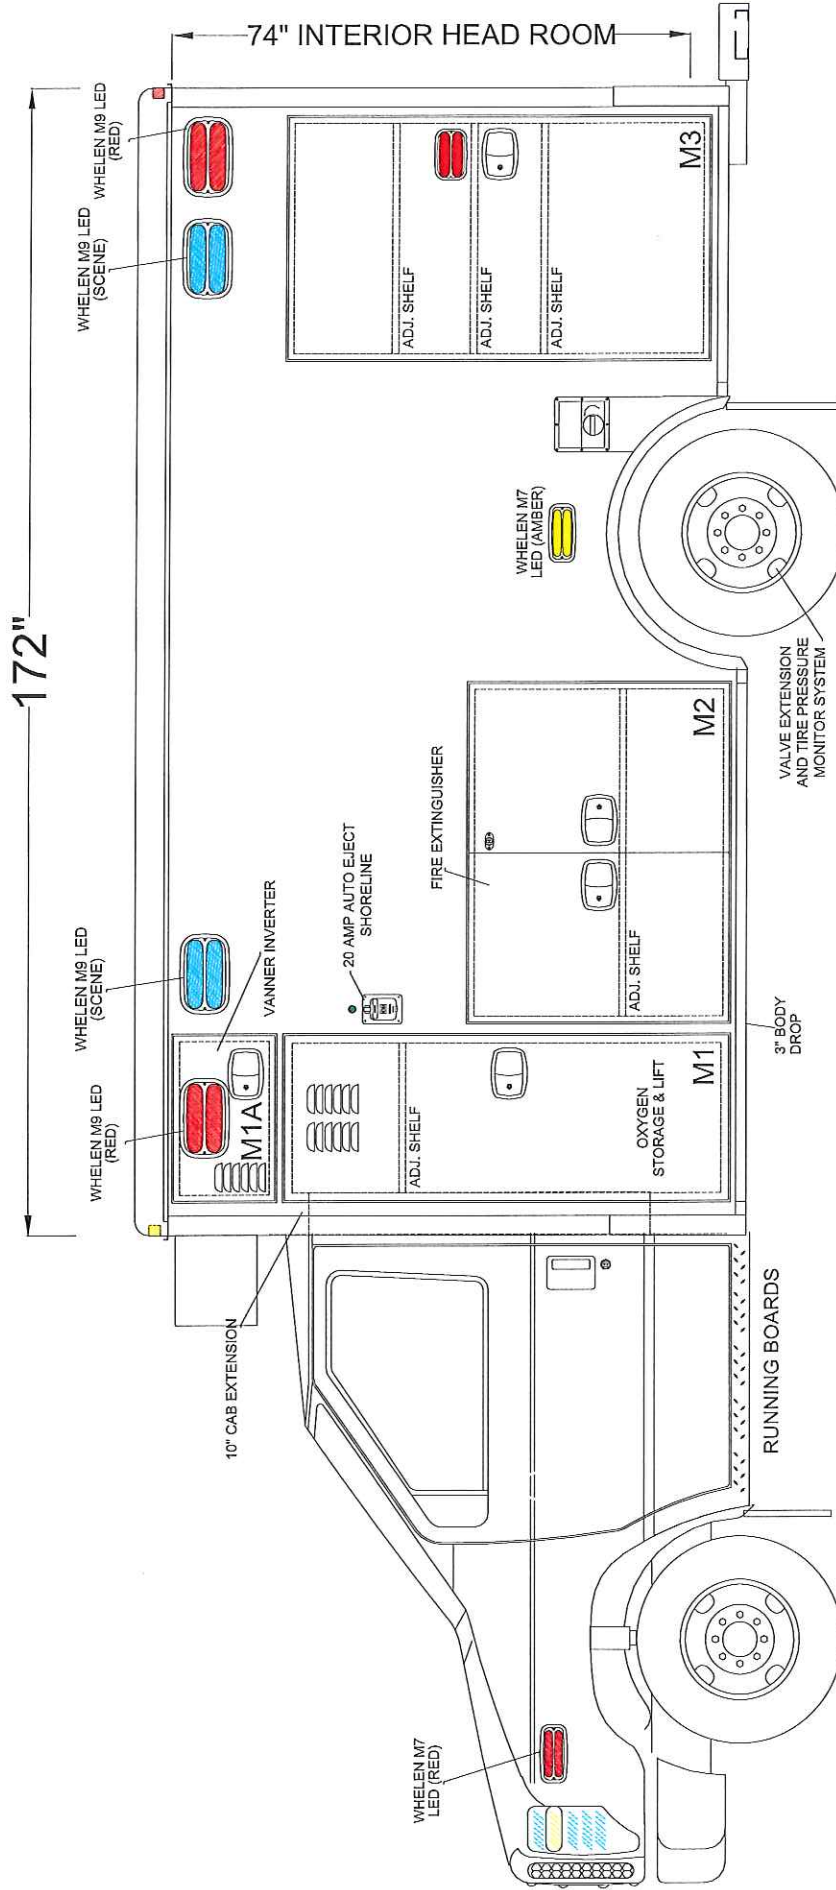

CUSTOMER: BERLIN EMERGENCY MEDICAL SERVICE

TYPE 3, FORD E450 , GASOLINE

MODULE DIMENSIONS: 172" x 96" x 74" HR

Compartment Dimensions

Compmt	Height	Width	Depth
M1	63.5"	22"	20"
M1A	17.5"	22"	20"
M2	34.5"	42"	20"
M3	60.5"	33.1"	20"

DATE: 12-11-2024


TRUCK#

REVISION#

BY: XQB

CONCEPTUAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE



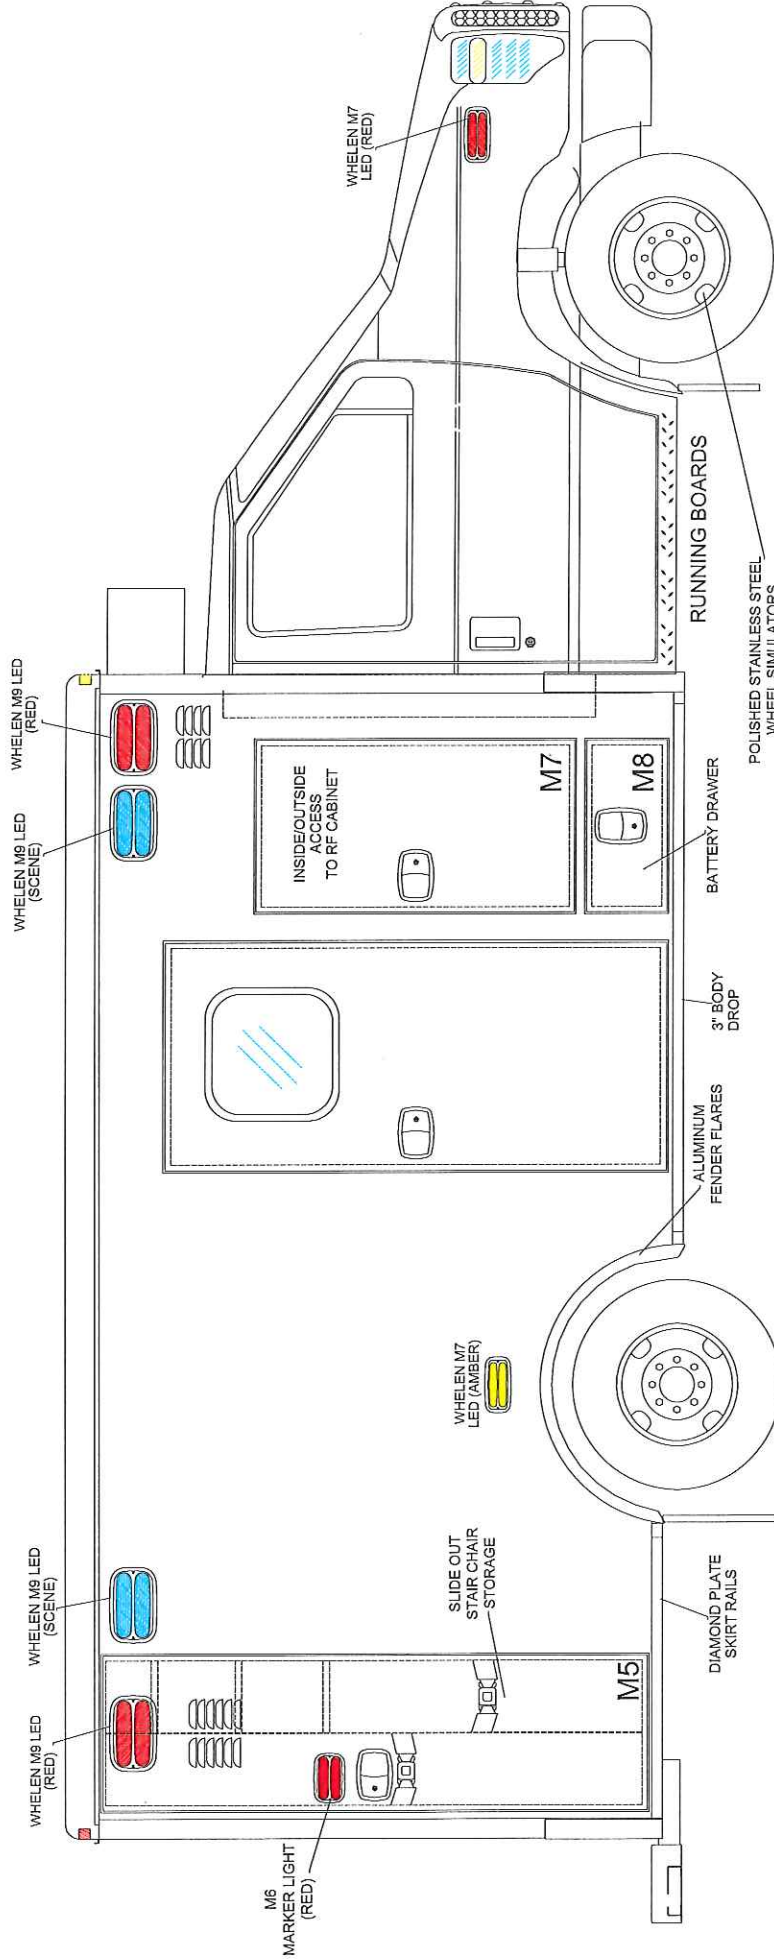

CUSTOMER: BERLIN EMERGENCY MEDICAL SERVICE

TYPE 3, FORD E450 , GASOLINE

MODULE DIMENSIONS: 172" x 96" x 74" HR

Compartment Dimensions

Compmt	Height	Width	Depth
M5	81.8"	21.6"	21.5"
M6	N/A	N/A	N/A
M7	48.6"	25.2"	I/O
M8	12.1"	25.2"	21"
C/S Access	73.8"	31"	N/A


DATE: 12-11-2024

TRUCK#

REVISION#

BY: XQB

CONCEPTUAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

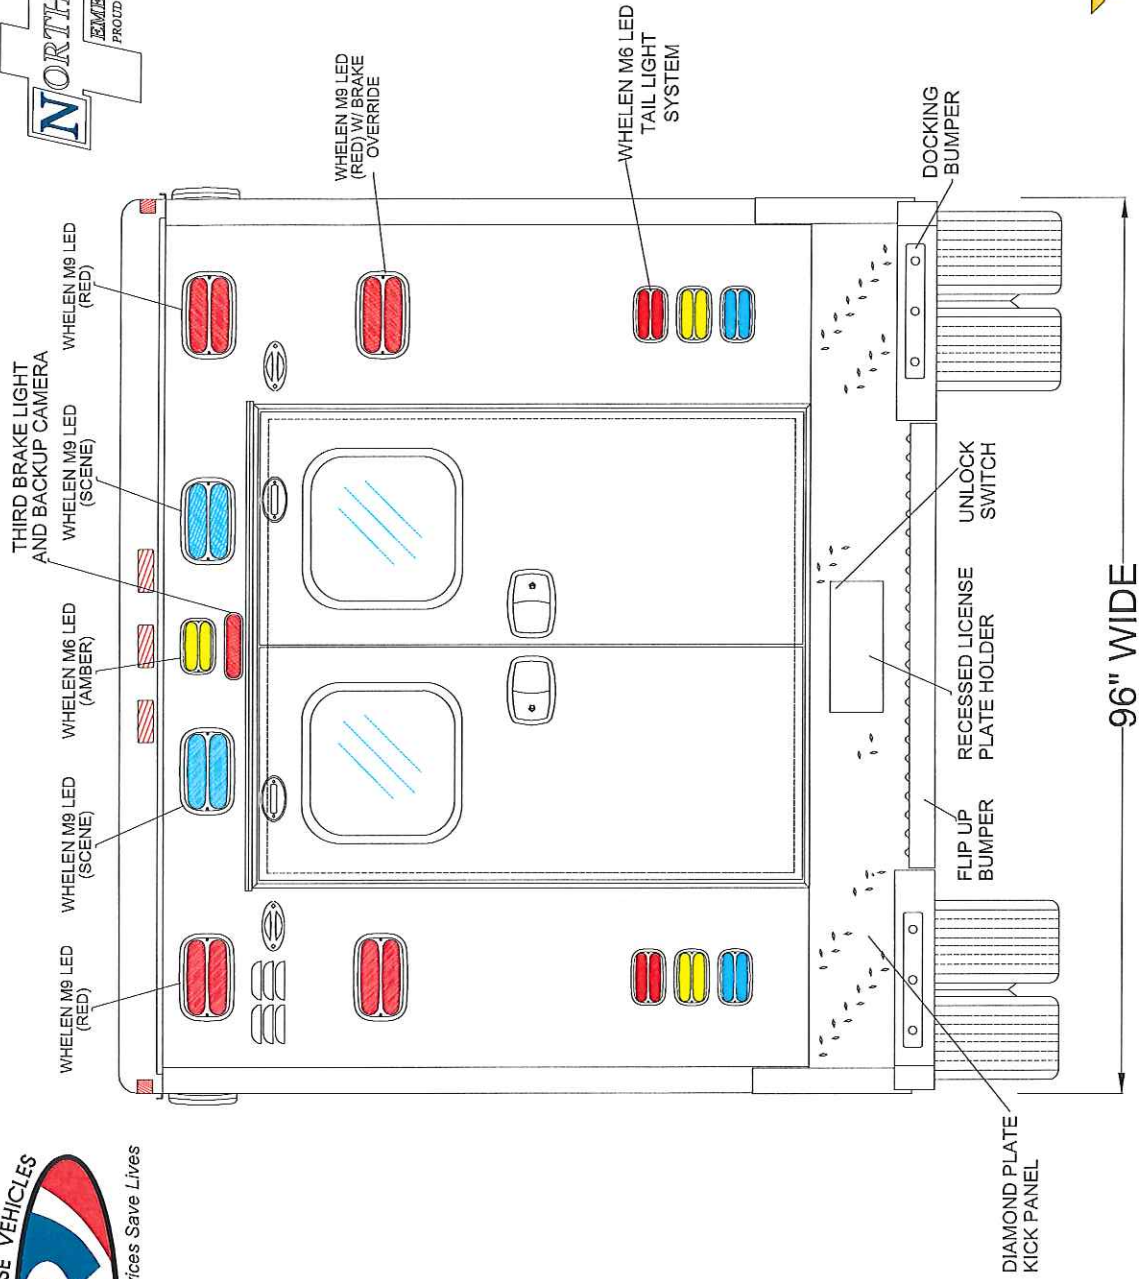

CUSTOMER: BERLIN EMERGENCY MEDICAL SERVICE

TYPE 3, FORD E450 , GASOLINE

MODULE DIMENSIONS: 172" x 96" x 74" HR

Compartment Dimensions

Cmpt	Height	Width	Depth
REAR Access	60.625"	46.75"	N/A


DATE: 12-11-2024

TRUCK#

REVISION#

BY: XQB

CONCEPTIONAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

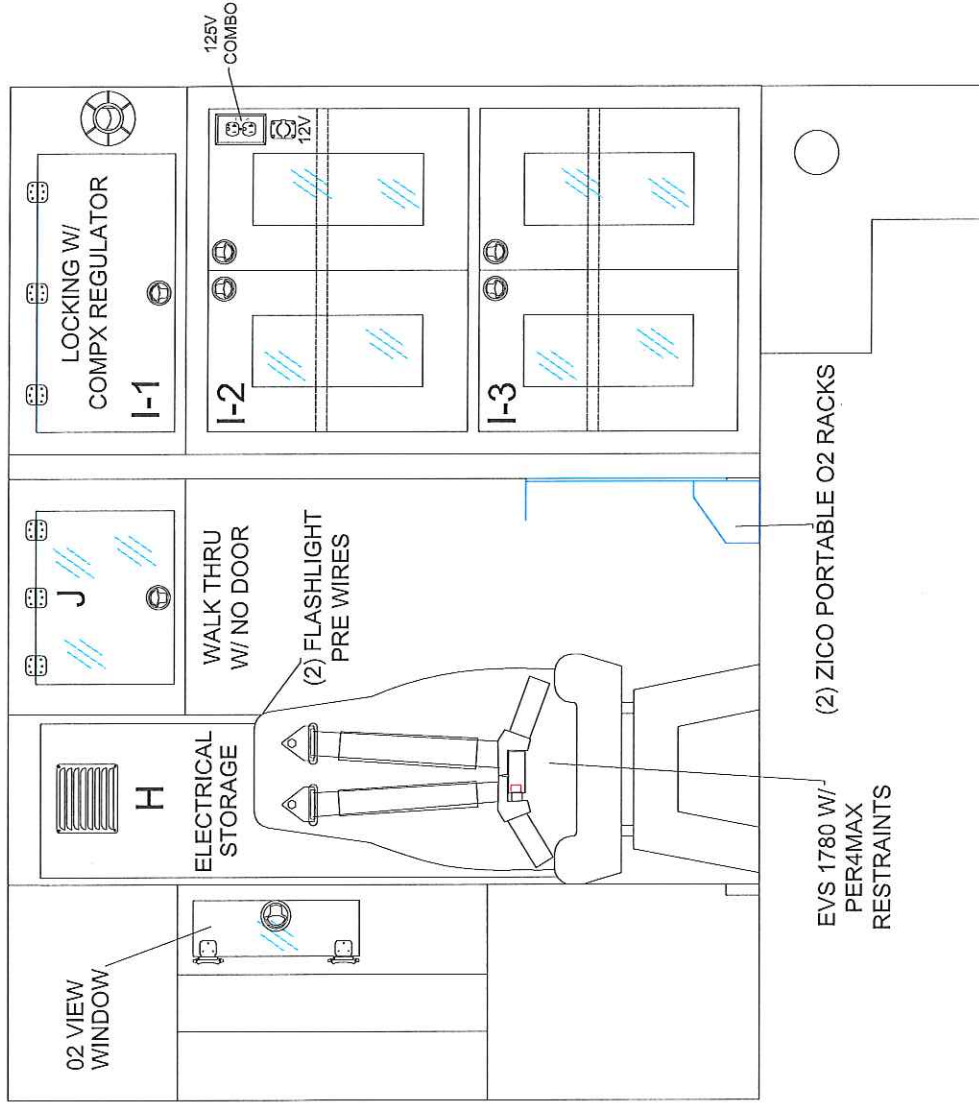

CUSTOMER: BERLIN EMERGENCY MEDICAL SERVICE

TYPE 3, FORD E450 , GASOLINE

MODULE DIMENSIONS: 172" x 96" x 74" HR

BULKHEAD

DATE: 12-11-2024


TRUCK#

REVISION#

BY: XQB

CONCEPTUAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE



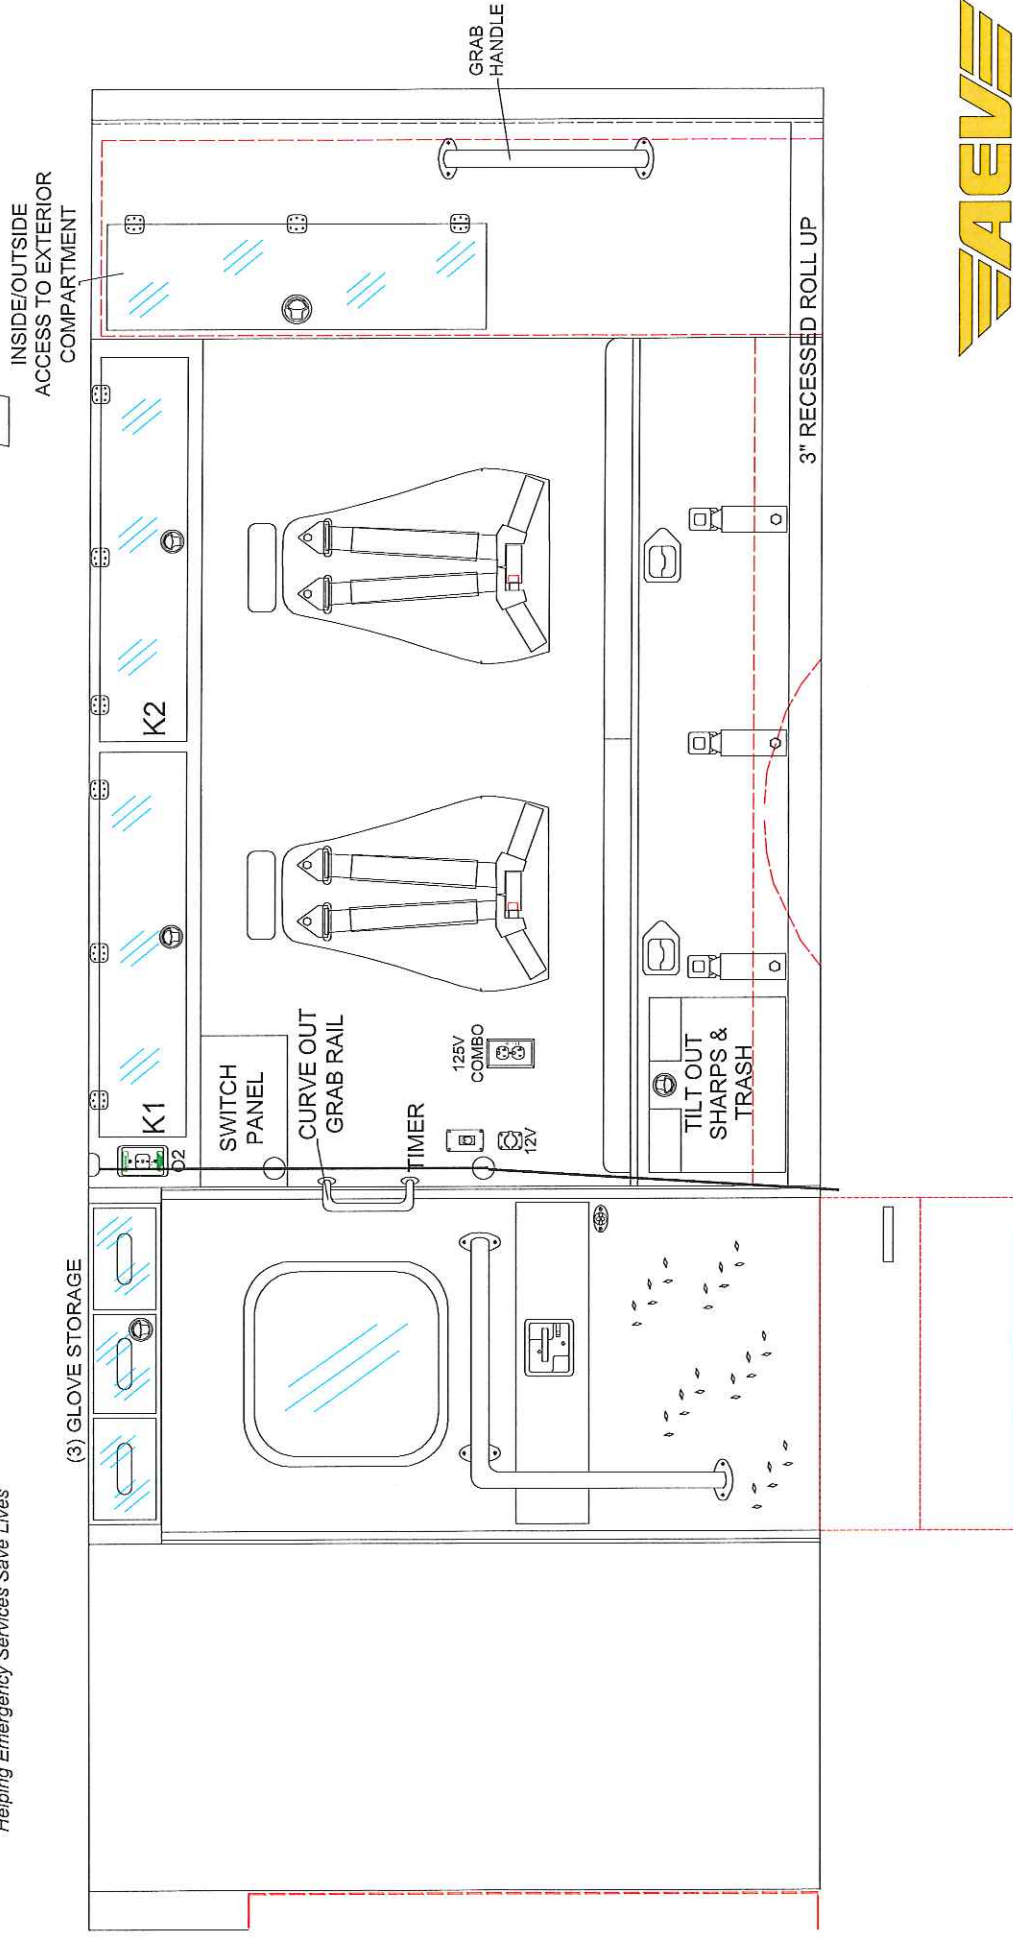


CUSTOMER: BERLIN EMERGENCY MEDICAL SERVICE	CURBSIDE INTERIOR	DATE: 12-11-2024
TYPE 3, FORD E450 , GASOLINE	MICA COLOR: GLOSS GRAY	TRUCK#
	LEXAN COLOR: CLEAR	REVISION#
	UPHOLSTERY COLOR: BLACK	
	DAYBRIGHT CABINET LIGHTS	BY: XQB
MODULE DIMENSIONS: 172" x 96" x 74" HR		
CONCEPTIONAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE		

ACTION AREA CONT:  
 2-O2 OUTLET  
 1-LX1 SWITCH PANEL  
 1-DIGITAL THERMOSTAT  
 1-SSCOR GAUGE  
 1-ELEC. O2 SOLENOID  
 1-O2 REGULATOR  
 SPACE FOR RADIOS

ANGLED

POWER EXHAUST

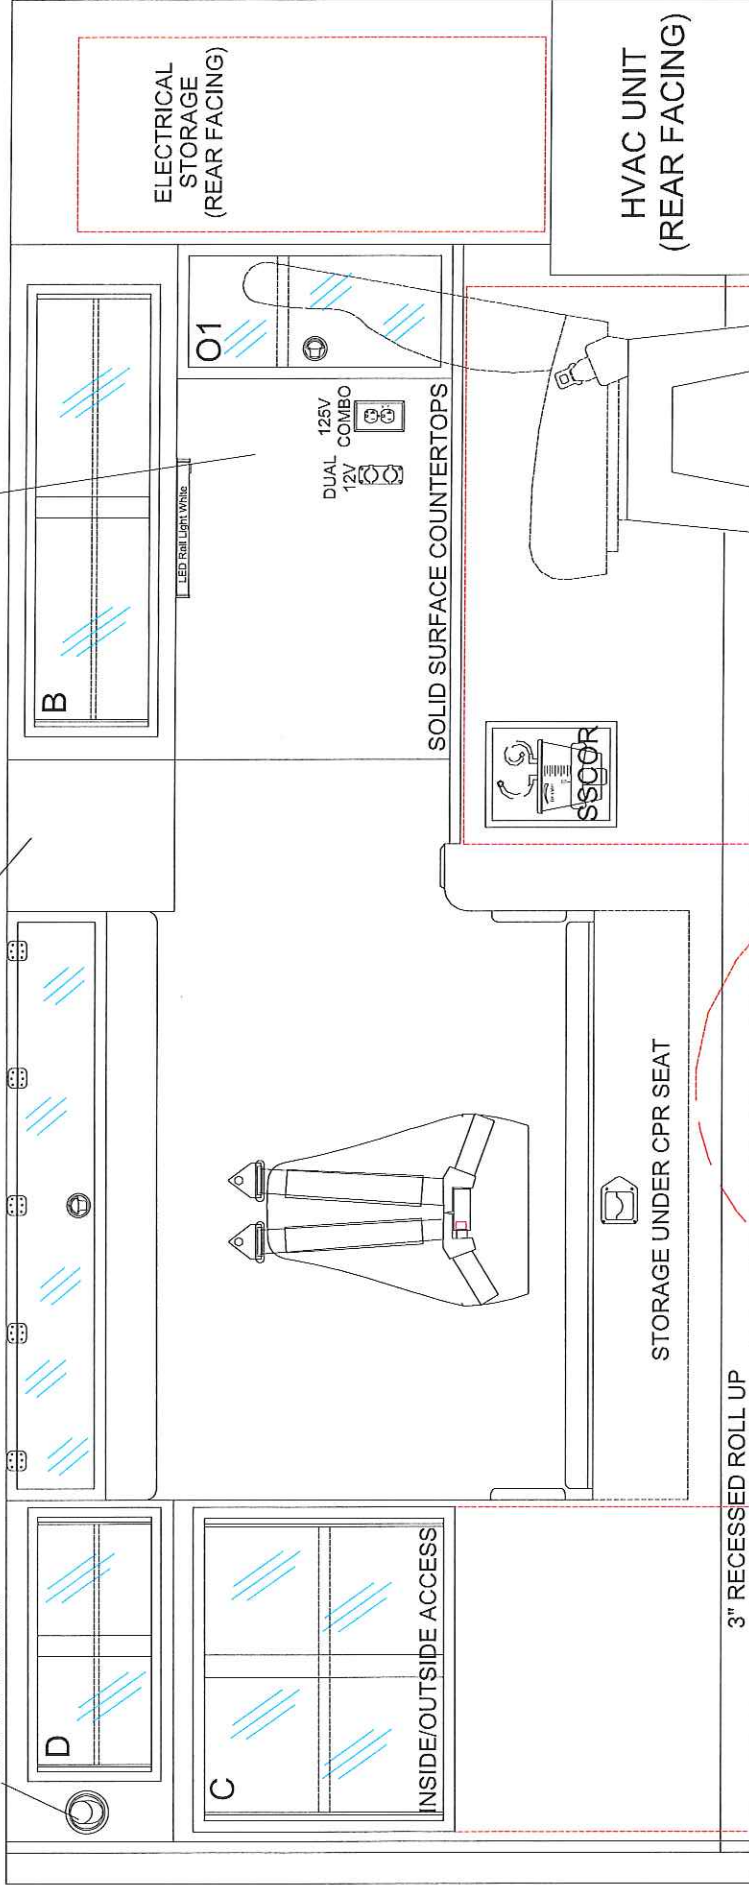

CUSTOMER: BERLIN EMERGENCY MEDICAL SERVICE

TYPE 3, FORD E450 , GASOLINE

MODULE DIMENSIONS: 172" x 96" x 74" HR

STREET SIDE INTERIOR

SOLID SURFACE COUNTERTOPS:  
 STEEL GRAY TEMPEST  
 COT MOUNT: PREP FOR STRYKER POWERLOAD  
 FLOORING: LONCOIN II #150 ONYX (BLACK)

DATE: 12-11-2024


TRUCK#

REVISION#

BY: XQB

CONCEPTUAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE

GLOVE STORAGE ON EACH SIDE OF CLOCK

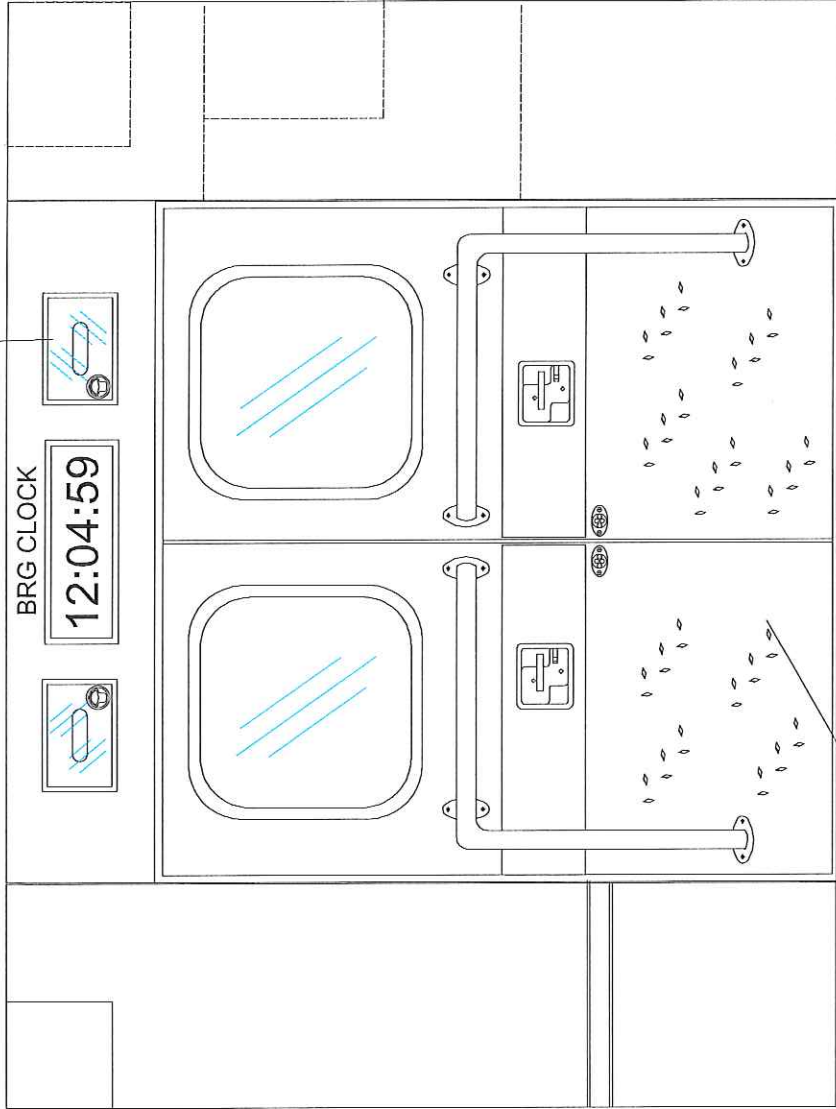

DOOR PANELS:  
MICA (UPPER)  
UPHOLSTERY (CENTER)  
DIAMOND PLATE (LOWER)



CUSTOMER: BERLIN EMERGENCY MEDICAL SERVICE

REAR ACCESS INTERIOR

DATE: 12-11-2024

TYPE 3, FORD E450 , GASOLINE

TRUCK#

REVISION#

MODULE DIMENSIONS: 172" x 96" x 74" HR

BY: XQB

CONCEPTUAL DRAWINGS ONLY: DRAWINGS ARE NOT TO SCALE, ALL MEASURES ARE APPROXIMATE & SUBJECT TO ENGINEERING CHANGE